

TRU-SPEC[®]

floorplate steel

AS/NZS 1594 – HA250

General description

Hot-rolled structural floorplate (raised pattern on one surface) with minimum yield strength of 250Mpa and good weldability. Stretch-levelled to remove internal stresses and for excellent flatness.

Typical uses

Architectural features
Stairs and walkways

Features & benefits

Guaranteed minimum strength levels
Excellent weldability
Good formability

Warnings

This material should be used in conjunction with the appropriate design and welding standards.

An untrimmed (Mill) edge may contain minor surface discontinuities as a result of the rolling process. It is recommended that customers satisfy themselves that the edge is suitable for the application.

Free from coil break for 3 months after production.

Material should be stored under cover to avoid issues with storage related corrosion.

No warranty is provided in relation to the use of this material for anti-slip applications.

This material is not suitable in 'wet' surface conditions and is not suitable in 'dry' surface conditions where ramps have a steeper incline than 1:14.


Customers to make their own assessment of the suitability of this product in the end use application.

Australian and International Standards

AS/NZS 1594:2002 (R2016)

AS/NZS 1365:1996 (R2016)

ISO 9001:2015 Quality System certified

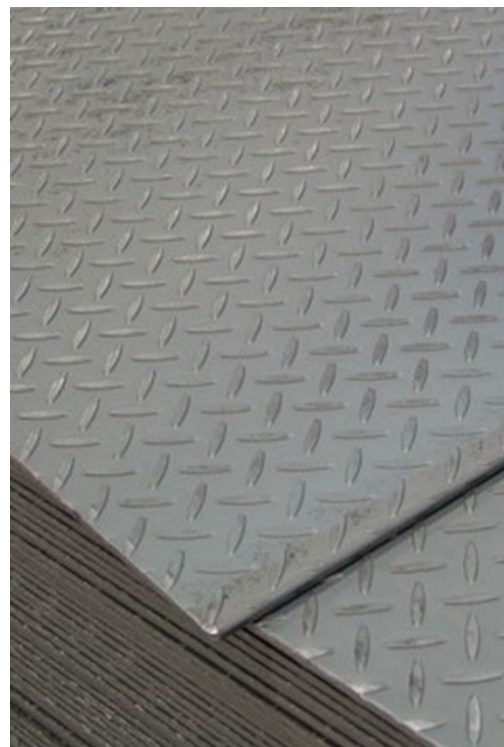

Supply conditions

	Normal
Thickness Range	2.1 – 8 mm *
Width Range	1195mm, 1200mm, 1210mm, 1220mm, 1500mm (other widths by enquiry) *
Length Range	1200mm - 12000mm *
Surface Finish	Floorplate
Edge Condition	Untrimmed (Mill Edge)
Tolerance	AS/NZS 1365:1996 (R2016)
Certification	BlueScope– Analysis and Mechanical Tests

* Not all thickness, width & length combinations are available
Optional supply conditions are subject to dimensional restrictions

Chemical composition

Element	Guaranteed Maximum %
Carbon	0.20
Silicon	0.030*
Manganese	1.20
Phosphorus	0.040
Sulfur	0.030
Aluminium	0.10
CEQ (IIW)	0.39

All values shown refer to the relevant Australian Standard unless otherwise stated

$$CEQ(IIW) = C + \frac{Mn}{6} + \frac{(Cr + Mo + V)}{5} + \frac{(Cu + Ni)}{15}$$

* Values refer to the Bluescope internal standard, whereas the AS/NZS 1594:2002 (R2016) guaranteed maximum is 0.35%

Mechanical properties

Tensile Properties (Longitudinal)		Thickness (mm) ($2.1 \leq t \leq 10$)
Yield Strength (MPa)	Guaranteed Min	250
Tensile Strength (MPa)	Guaranteed Min	350
Elong. on 200 mm (%)	Guaranteed Min	-

Galvanised Coating Characteristics Related to Steel Composition

Category

A

Refer to Table 9.1 of AS/NZS 2312.2:2014

Where aesthetics are important or where particular coating thickness, surface smoothness or resistance to handling damage criteria exist, specialist advice on steel selection should be sought prior to fabrication of the article or hot dip galvanising.

Weldability Group

WTIA Group

3


Refer to WTIA Technical Note 1 or AS/NZS 1554.1:2014

Slip resistance

Slip resistance classification tests*	Classification
Wet Pendulum Test (Appendix A)	P3
Oil-Wet Inclining Platform Test (Appendix D)	R10

* Limited testing has been undertaken on this material to assess compliance with AS 4586: 2013 'Slip resistance classification of new pedestrian surface materials'. These tests were undertaken on newly produced Floorplate with no surface treatment.

Floorplate Pattern

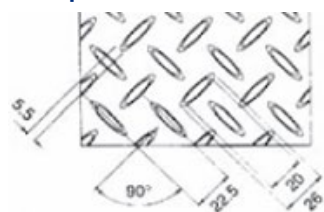

* Lozenge height approximately 1.5mm (Dimensions are indicative only)

Fire hazard properties

Test & Evaluation Method	Result
Combustibility test for materials (AS 1530.1-1994 (R2016))	Not deemed combustible (steel substrate) #

These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use.

steel.com.au

To ensure you have the most current information

1800 024 402

steeldirect@bluescopesteel.com
For more information contact Steel Direct



The information contained in this datasheet is provided by way of general information about this product only, and has not been prepared with your specific needs in mind. We recommend that you seek BlueScope's advice as to the suitability of this product for the purpose(s) for which you propose to use it. To contact BlueScope for advice about your proposed use of this product, please contact Steel Direct. TRU-SPEC®, TRUSPEC®, BlueScope and the BlueScope brand mark are registered trade marks.
© 2024 BlueScope Steel Limited ABN 16 000 011 058. All rights reserved.