

Product Description

EconoClad® is a high performing and low cost roofing or walling insulated panel suitable for industrial and commercial cladding. EconoClad® has a non-ozone depleting fire-retardant PIR core bonded between a hi-tensile Colorbond® or Zinalume™ steel roof and a silver/white/black, multi-layered foil/fibreglass/PVC flexible facings on the internal side. EconoClad® is a fast, economical and practical roof or wall cladding option.

Panel Properties					
Panel Thickness (mm)	25	40	60	80	100
Typical Mass (kg/m ²)	5.6	6.3	7.1	7.9	8.7
Total R-value (m ² K/W)	1.6	2.4	3.5	4.5	5.6

Note: The above Total R-values are for insulation average temperature of 15°C. Contact us for other temperatures.

Span Table

NON-CYCLONIC REGION A & B (ROOF APPLICATION ONLY)

PIR Core / 0.42mm Hi-tensile External Steel Skin.

Maximum uniformly distributed ultimate wind load (kPa) for the given span:

Span (mm)	Panel Thickness (mm)	
	25, 40 & 60	80 & 100
600	8.05	8.05
900	5.38	5.38
1200	4.05	4.05
1500	-	3.25
1800	-	2.51
2100	-	1.72*
2400	-	1.16*

* For Region B, 1.86kPa and 1.43kPa can be used for 2100mm and 2400mm span respectively.

Recommended Uses

Air conditioned offices, supermarkets, agricultural buildings, industrial buildings, warehouses, commercial buildings, domestic re-roofing.



Core	PIR (Fire-retardant Polyisocyanurate)
Width (cover mm)	1000
Thickness (mm)	25, 40, 60, 80, 100
Length	Up to 16m (check for availability)
External Material	0.42mm G550 Zinalume™ or Colorbond® steel
External Finishes	High-Rib Trapezoidal Cladding Profile
Exterior Colour Options	Surfmist® and Zinalume®, Other colours available subject to minimum order quantities.
Internal Material	Lightweight Thermal Foil, Fibreglass, PVC
Internal Finishes	Foilback, Embossed PVC
Interior Colour Options	Bright White, Silver, Black
Pitch	2 degree minimum
Paint System	AS/NZS 2728 & AS 1397
Accreditations	
Acoustic Properties	Rw 23
Material Group Numbers	C1.10 Group 2
Bushfire Attack Level	BAL-40
FM Approval	4880
Environmental	Zero Ozone Depleting Potential (ODP)
Fire hazard properties	AS/NZS 1530.3
Ignitability Index	0
Spread of Flame Index	0
Heat Evolved Index	0
Smoke Index	1

AS/ISO 9705 - BCA Group Number (Spec C1.10)


EconoClad® PIR steel skinned insulated building panels conform to the requirements of the BCA Specification C1.10 as Group 2.

Under certain construction applications, EconoClad® can achieve FM Approval. Refer to your local Metecno® branch.

NOTES:

- Extended span tables including cyclonic regions C&D and wind pressure acting inwards are also available. Refer Metecno®.
- Fixing with min. 14g tek screws (or equivalent) at each rib are required. Values only valid for use with steel members of bmt 1.5mm or thicker. For thinner steel substrates, fastener capacities must be checked.
- Pressures specified are for wind gusts only per AS/NZS 1170.2.
- Deflection limit of span/120 applies, and in accordance with Serviceability Limit State criteria per AS1562.1 - Cl 5.5.
- Self weight of the panel has been allowed for, plus an allowance of up to 10kg/m² for light duty fittings (lights, etc.). No other dead loads permitted.
- Non-trafficable maintenance access (concentrated load) of 110kg on any one panel has been allowed for in accordance with min. requirements of AS/NZS 1170.1.
- Distributed live load of 0.25kPa (as per AS/NZS 1170.1) has been allowed for. Metecno® tests comply with details outlined in AS 4040.0, AS 4040.1, AS 4040.2, AS 4040.3, AS 1562.1 and AS/NZS 1170.1.
- Min. roof slope of 2 degree applies.

EconoClad®

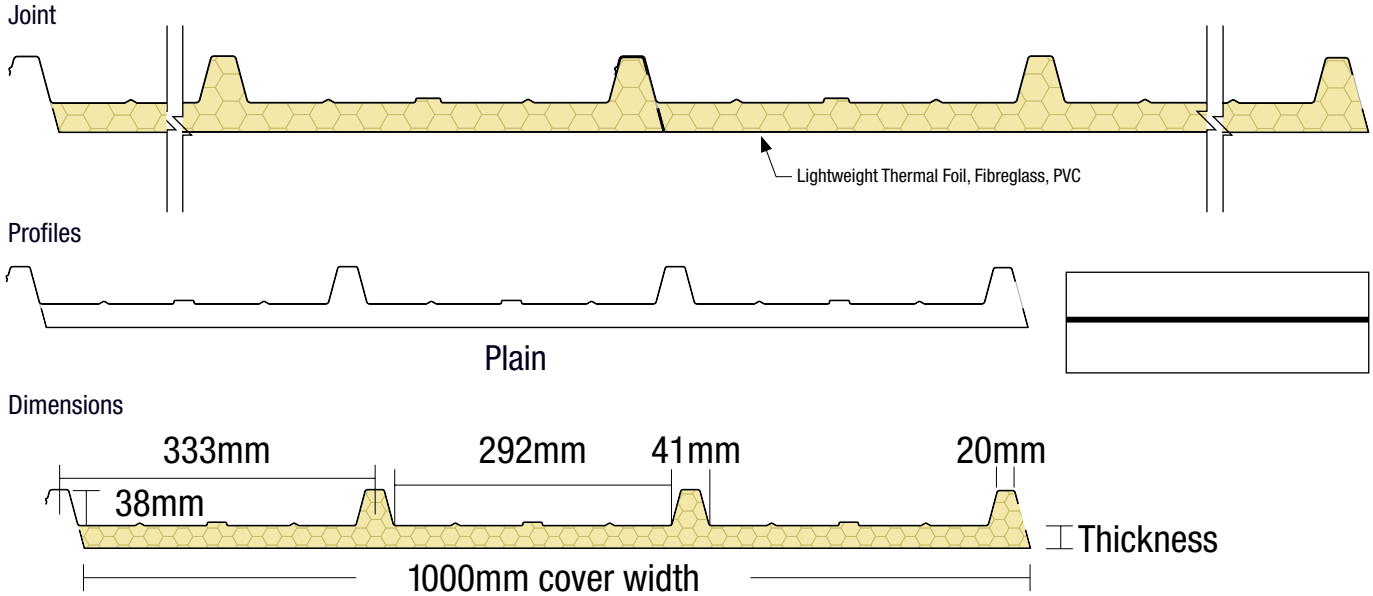

Bondor® National Network

BRISBANE / EXPORT
103 Ingram Road
Acacia Ridge QLD 4110
T: 07 3323 8500
F: 07 3323 8501

MELBOURNE
329A St Albans Road
Sunshine VIC 3020
T: 03 8326 8000
F: 03 8326 8099

SYDNEY
49 – 53 Newton Road
Wetherill Park NSW 2164
T: 02 9609 0888
F: 02 9729 1114

PERTH
17 Gauge Circuit
Canning Vale WA 6155
T: 08 9256 0600
F: 08 9256 0620

ADELAIDE
70 – 72 Rundle Road
Salisbury South SA 5106
T: 08 8282 5000
F: 08 8282 5099

LAUNCESTON
7 Connector Park Drive
Kings Meadows TAS 7249
T: 03 6335 8500
F: 03 6335 8544

To connect to your nearest Bondor® branch simply call 1300 300 099 or visit www.bondor.com.au