

# Environmental Product Declaration

In accordance with ISO 14025  
and EN 15804:2012+A2:2019



# TRUECORE<sup>®</sup> steel EPD



AUSTRALASIA **EPD**<sup>®</sup>  
ENVIRONMENTAL PRODUCT DECLARATION

Programme: **EPD Australasia** | [epd-australasia.com](http://epd-australasia.com)

Programme Operator: **EPD Australasia Limited**

EPD Registration number: **S-P-08455**

Version **1.0**

Publication date: **2023-05-25**

Version date: **2023-05-25**

Valid until: **2028-05-25**

Geographical scope: **Australia**

## Environmental Product Declaration

TRUECORE® steel

# Programme-Related Information and Verification

EPD Owner:	<b>BlueScope Steel Ltd</b> steeldirect@bluescopesteel.com www.bluescope.com Level 11, 120 Collins St, VIC 3000, Australia
EPD Produced by:	<b>thinkstep-anz</b> info@thinkstep-anz.com www.thinkstep-anz.com
Programme Operator:	<b>EPD Australasia Ltd</b> info@epd-australasia.com www.epd-australasia.com 315a Hardy Street, Nelson 7010, New Zealand
Product Category Rules (PCR):	PCR 2019:14 Construction Products, Version 1.11, 2021-02-05
PCR review conducted by:	<b>The Technical Committee of the International EPD® System</b> Chair: Claudia A. Peña Contact: info@environdec.com
Independent verification of the declaration and data, according to ISO 14025:	<input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification (external)
Third party verifier:	 <b>Rob Rouwette, start2see Pty Ltd</b> Rob.Rouwette@start2see.com.au
Verifier approved by:	<b>EPD Australasia Ltd</b>
Procedure for follow-up during EPD validity involves third party verifier:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Version History:	v1.0 Initial release.

### General Information

- EPDs within the same product category but from different programmes may not be comparable.
- EPDs of construction products may not be comparable if they do not comply with EN 15804:2012+A2:2019 or if they are produced using different Product Category Rules (PCR).
- BlueScope Steel Limited has sole ownership, liability and responsibility for this EPD.



Smalls Road Public School

Ryde, NSW

Architect: Conrad Gargett

Steel Frame Fabricator: Austruss

Image courtesy of School Infrastructure NSW and Austruss

Light gauge steel framing made from TRUECORE® steel

## Environmental Product Declaration

TRUECORE® steel

### BlueScope Steel Products

## Smalls Road Public School

Precisely engineered frames made from TRUECORE® steel have an impressive strength-to-weight ratio. Prefabricated modules were assembled on site and craned into position to form the upper-level wall frames and roof trusses to deliver the vision of this circular design concept.

Utilising light gauge steel (LGS) frames made from TRUECORE® steel helped improve build efficiencies and contributed to delivery of the project in time for commencement of the 2020 school year.



Smalls Road Public School

Ryde, NSW

Architect: Conrad Gargett

Steel Frame Fabricator: Austruss

Image courtesy of School Infrastructure NSW and Austruss

Light gauge steel framing made from TRUECORE® steel

## Declared Unit

This EPD provides data for one flat square metre (1 m<sup>2</sup>) of TRUECORE® steel manufactured by BlueScope in Australia at certain Base Metal Thicknesses (BMTs) ranging from 0.42 to 1.60 mm.

## Key Insights

### Benefits of using this EPD 8

This EPD can contribute to the achievement of credits under green building rating schemes. It:

- Is independently verified
- Includes indicators for Green Star and IS Rating

### BlueScope's Climate Action 10

Steel and embodied carbon 11

Achieving sustainable outcomes with steel 12

### Product Information 16

Product description 16

Product content 17

Scope of the declaration 19

- Cradle to gate (A1-A3) with modules C1-C4 and module D
- Includes an extension of the A1-A3 scope to include rollforming operations

### Environmental Performance 22

Results for one flat square metre (1 m<sup>2</sup>) of TRUECORE® steel in the following base metal thicknesses (BMTs) where the base metal is the steel:

• 0.42 mm	24
• 0.48 mm	26
• 0.55 mm	28
• 0.60 mm	30
• 0.75 mm	32
• 0.95 mm	34
• 1.00 mm	36
• 1.15 mm	38
• 1.20 mm	40
• 1.50 mm	42
• 1.60 mm	44

Note: EN 15804:2012+A1:2013 compliant results are also given in this document to assist comparability across EPDs and support use in tools such as Green Star and IS Rating.

## Benefits of using this EPD

This EPD can contribute to the achievement of credit points under Green Star rating tools, the IS Rating Scheme (IS) and other leading green building rating schemes.

### Green Star

Green Star registered projects can score points for using products with EPDs. BlueScope's steel products and this EPD may help obtain points in:

- Green Star – Design and As Built v1.3
  - Credit 19A – Life Cycle Assessment
  - Credit 19B.2 – Life Cycle Impacts – Steel
  - Credit 20.1 – Responsible Building Materials
  - Credit 21 – Sustainable Products
- Green Star – Buildings
  - Credits 6 to 9 – Responsible Products (Structure, Envelope, Systems or Finishes)
  - Credit 21 – Upfront Carbon Emissions
  - Credit 26 – Life Cycle Impacts
- Green Star – Communities v1.1
  - Credit 26 – Materials

### IS Rating

IS projects can claim points for using products with EPDs. EPD results can also be included in the IS Materials Calculator and may help a project achieve reductions compared to a 'base case' footprint.

BlueScope's steel products and this EPD may help obtain points in:

- IS Design & As Built v1.2
  - Mat-1 Materials Life Cycle Impact Measurement and Reduction
  - Mat-2 Environmentally Labelled Products and Supply Chains
- IS Design & As Built v2.1
  - Rso-6 Materials Life Cycle Impact Measurement and Reduction
  - Rso-7 Sustainability Labelled Products and Supply Chains

BlueScope's products are also included in the Infrastructure Sustainability Council (ISC) ISupply Directory which connects products and services with projects and assets undertaking IS ratings.

This EPD also provides:

- Environmental performance information from cradle to gate (modules A1-A3), with an extension of the A1-A3 scope to include rollforming operations, plus modules C1-C4 and module D.
- Carbon footprint data for use in Scope 3 carbon footprint calculations of your supply chain.
- A wide range of environmental metrics, such as water, energy and waste.

For more information on how BlueScope's products can help achieve more sustainable project outcomes contact BlueScope Steel Direct on 1800 800 789.

### Take care when comparing

When comparing EPDs it is important to consider:

- EPDs within the same product category but from different programmes or utilising different Product Category Rules (PCRs) may not be comparable.
- The results for EN 15804:2012+A1:2013 compliant EPDs are not comparable with EN 15804:2012+A2:2019 compliant ones, as the methodologies differ. This EPD provides additional results in accordance to EN 15804:2012+A1:2013 to assist comparability across EPDs and support use in rating tools such as Green Star and IS Rating.
- EPDs of construction products from a group of manufacturers (industry-wide EPD) may not be comparable to an EPD of a similar construction product that has been generated by a single manufacturer (product-specific or manufacturer-specific EPD).
- Understanding the detail is important in comparisons. Expert analysis is often required to understand the detail and ensure data is truly comparable, to avoid unintended distortions.
- The best way to compare products and materiality of differences is to place them into the context of a structure across the whole life cycle.

If you need help interpreting the data in this EPD, please contact BlueScope Steel Direct on 1800 800 789.

# BlueScope's Climate Action

Steel is an essential material for modern society and a critical enabler of sustainable development. We recognise that steelmaking is emissions-intensive and we are committed to climate action. Our climate strategy outlines our decarbonisation plans, including our goal of net zero greenhouse gas emissions across our operations by 2050<sup>1</sup>, dependent on several enablers based around technology, renewable energy and public policy.

We have a promising innovation pipeline including collaborations with Rio Tinto and others, to explore ways to decarbonise iron and steelmaking processes. We believe these projects will help take us to the cutting edge of current technologies and demonstrate our commitment to reduce the embodied carbon of our products.

More information on BlueScope's climate action, can be found on our website: [www.bluescope.com/sustainable-steel](http://www.bluescope.com/sustainable-steel)

## OUR PATHWAY

### SET A GOAL FOR:

# NET ZERO

GHG emissions across our operations by 2050<sup>1</sup>

### SET TARGETS FOR:

# 12%

GHG emission intensity reduction by 2030 for our steelmaking activities (based on 2018 levels)

# 30%

GHG emission intensity reduction by 2030 for our non-steelmaking activities<sup>2</sup> (based on 2018 levels)

1. Our net zero goal covers BlueScope's Scope 1 and 2 GHG emissions. Achieving the 2050 net zero goal is highly dependent on several enablers, including commerciality of emerging and breakthrough technologies, the availability of affordable and reliable renewable energy and hydrogen, availability of quality raw materials, and appropriate policy settings.  
 2. The Non-Steelmaking Target applies to our midstream activities that include our cold rolled, metal coating and painting lines and long and hollow products. It excludes our downstream activities.  
 3. Pickin J et al., National Waste Report 2020, Prepared for the Department of Agriculture, Water and the Environment; 2020, p. 39.  
 4. Refers to the carbon emissions, or emissions of greenhouse gases, associated with materials throughout the life cycle of a building or infrastructure, not to the carbon content in the metal alloy.  
 5. [www.worldsteel.org/about-steel/steel-facts.html](http://www.worldsteel.org/about-steel/steel-facts.html)  
 6. [www.iea.org/reports/iron-and-steel-technology-roadmap](http://www.iea.org/reports/iron-and-steel-technology-roadmap)



## Steel and Embodied Carbon

Steel is one of the most recycled materials in the world, with the inherent value of scrap driving its recovery. In Australia, this is evidenced by a recycling rate for metals of 90%<sup>3</sup>. The recyclability of steel is enabled by its magnetic properties, which mean that it can be easily separated for recycling and is less likely to end up in landfill.

The recycled content in a steel product can have a significant effect on embodied carbon. While specifying high levels of recycled content can be an effective way of minimising the embodied carbon<sup>4</sup> of many materials, especially those likely to be disposed of at end of life, recycled content is not necessarily a useful metric for steel in the context of reduction of carbon emissions by the steel sector. This is because despite being one of the most recycled materials in the world<sup>5</sup>, there is not enough steel scrap available to meet the growing global demand for steel<sup>6</sup>.

Specification of 'secondary' steel or steel products with higher levels of recycled content as a means of reducing embodied carbon, is unlikely to cause more steel to be recycled. Rather, doing so may shift the environmental burden around the value chain, and in fact increase the burden, as scrap and the final product may be transported around the globe unnecessarily.

While global demand for scrap continues to outstrip supply, the development and deployment of new low GHG emissions technologies for 'primary' steel production (using raw material inputs such as iron ore and metallurgical coal) while increasing the role of 'secondary' steelmaking (principally using scrap steel), will be key to reducing carbon emissions in the steel sector.



BlueScope is a founding member of ResponsibleSteel™, the steel industry's first global multi-stakeholder standard and certification program. It has been designed to ensure customers, stakeholders and consumers can be confident that the steel they use has been sourced and produced responsibly.

Initiatives, such as ResponsibleSteel™, are incorporating new methodologies to ensure that the carbon emissions of steel products are calculated on a like-for-like basis, irrespective of the input materials used and the steel production technology.

### Embodied carbon and climate transition in a hard-to-abate sector

There is growing recognition from research and standard setting organisations that the percentage of recycled content in steel is not a good proxy for climate transition for the steel sector.

New methodologies, tools and guidance are being developed by organisations such as ResponsibleSteel™, to enable steel companies to set targets that align with science-based decarbonisation pathways and consider the unique context of the sector.

BlueScope is a participant in the Expert Advisory Group convened by the Science Based Targets initiative (SBTi) for the development of science-based target setting methodologies, tools and guidance in the steel sector to help meet the 1.5 °C goal of the Paris Agreement.

These initiatives build on the work of the Net Zero Steel Pathway Methodology Project (NZSPMP), which developed recommendations to identify and recognise low carbon emissions steelmaking, irrespective of the proportion of scrap or iron ore used as the primary input material. This approach would enable users to identify and reward reductions in embodied carbon and efficiencies in manufacturing practices for the steel sector, rather than simply identifying products that use more or less scrap steel, creating the basis for downstream users of steel to contribute to the achievement of the Paris Agreement through their steel specifying and purchasing decisions, and to recognise responsible steelmakers for their own commitment.

More information: [www.sciencebasedtargets.org/sectors/steel](http://www.sciencebasedtargets.org/sectors/steel) and [www.netzerosteelproject.com](http://www.netzerosteelproject.com)

## Achieving Sustainable Outcomes with Steel

Steel is central to a circular economy – one where resources and materials are kept in use for as long as possible and then repaired, returned or recycled. Steel can be infinitely recycled and is 100% recyclable without loss of quality.

### Design considerations

**Life cycle thinking.** A focus on design is important to minimise the whole of life impact of any construction project. Steel is a strong, durable and versatile material. It lends itself well to structures that are designed for long life, resilience and flexibility to accommodate multiple future reuse options without reinvestment in structural alteration and refurbishment. Steel also supports designs where end of life considerations are key e.g. designing for disassembly and reuse.

**Dematerialisation.** BlueScope manufactures a range of standard and high strength steel grades in plate and coil form. High strength steel grades enhance the strength to weight performance in structural steel applications when the design is governed by strength; by maximising the strength grade, a reduced volume of steel would be required in these applications, e.g. columns and primary members. This in turn can result in embodied carbon savings relative to a reference building design that utilises standard steel grades.

### Specification considerations

**ResponsibleSteel™.** ResponsibleSteel™ is the steel industry's first global multi-stakeholder standard and certification initiative. The ResponsibleSteel™ Standard covers a wide range of sustainability topics, including Climate Change and Greenhouse Gas Emissions, Biodiversity, Water Stewardship and Human Rights. Specifying steel from a ResponsibleSteel™ certified site supports steel manufacturers such as BlueScope who are committed to climate action and sustainability. It also supports those downstream to manage ESG (Environmental, Social and Governance) risks in the steel supply chain.

More information: [www.responsiblesteel.org](http://www.responsiblesteel.org)

**EPDs and ecolabels.** EPDs and ecolabels demonstrate a manufacturer's commitment to product transparency and stewardship. EPDs and ecolabels provide key sustainability information to support decision-making and the achievement of more sustainable outcomes.

Further information on the sustainability credentials of BlueScope's products: [www.steel.com.au](http://www.steel.com.au)

**Manufacturer commitments and investment.** Understand the commitments manufacturers have made to sustainability and climate change action and consider their investment in Research & Development activities.

More information on BlueScope's commitments and activities can be found in our Climate Action Report and Sustainability Report: [www.bluescope.com/sustainable-steel/reports/](http://www.bluescope.com/sustainable-steel/reports/)



Penguin Parade Visitor Centre

Phillip Island, VIC

Architect: Terroir

Steel Frame Fabricator: Cortek

Photography: © Peter Bennetts 2019

Light gauge steel framing made from TRUECORE® steel

# Contributing to a Sustainable Future

BlueScope has a long-standing commitment to developing innovative, responsible products and services. You can design and specify with confidence, knowing that TRUECORE® steel is created with durability, performance, compliance and sustainability top of mind.

## Steel and the Circular Economy

Steel is strong, durable, and versatile and its inherent properties allow it to be recycled without loss of quality over and over again. In some cases, it can be reused without reprocessing, again saving on energy and resource use.

To help support a more sustainable 'circular economy', the steel manufactured by BlueScope in Australia incorporates pre- and post-consumer recycled content<sup>7</sup>. Steel is 100% recyclable and its magnetic properties mean that it can be easily separated for recycling and is less likely to end up in landfill.

As frames made from TRUECORE® steel are generally fabricated off-site to exact specifications, minimal offcuts are generated during fabrication and minimal cutting is required onsite. This means that minimal waste is produced offsite and onsite, which results in greater material efficiency.

## Durable and Resilient

TRUECORE® steel is durable and resilient, with BlueScope's industry-leading metallic coating, incorporating Activate® technology, to provide enhanced corrosion resistance. Its long life can help conserve resources and energy that may otherwise be invested in products with shorter life spans.

TRUECORE® steel is 100% termite and borer proof, and it won't ignite or contribute to the spread of fire. When used as part of the NASH bushfire standard, frames made from TRUECORE® steel can help provide simple construction solutions to achieve National Construction Code compliance – even in the most severely rated flame zone (BAL-FZ).

Under the National Construction Code, TRUECORE® steel may be used wherever a non-combustible material is required. This allows TRUECORE® steel to be used in commercial and residential applications such as facades, walls, intermediate floor joists and roof structures.



## Warranty Confidence

When you specify, purchase or install TRUECORE® steel you are also benefiting from the support of BlueScope, one of Australia's largest manufacturers. TRUECORE® steel is renowned for its durability, and is backed by BlueScope. BlueScope offers a variety of warranties subject to application and eligibility criteria<sup>8</sup>.



### Certification of Port Kembla Steelworks

BlueScope's Port Kembla Steelworks is certified to the ResponsibleSteel™ Standard version 1.1. Australia's largest steel production facility has an annual production capacity of approximately 3 million tonnes of crude steel.

It manufactures slab, hot rolled coil and plate products. Branded products such as TRUECORE® steel, COLORBOND® steel, ZINCALUME® steel and XLERPLATE® steel are manufactured from steel produced at the Port Kembla Steelworks.

<sup>7</sup> Across the range of steel products manufactured by BlueScope in Australia, the average recycled content (according to recycled content categories defined in ISO 14021:2016) in the steel is 17.4%, which includes pre- and post-consumer recycled materials. Scrap and iron-bearing materials generated and reclaimed from BlueScope's steelmaking, coating and painting operations represent an additional 6.8% recovered content, which is not reported as recycled content. Scrap from rollforming and fabrication processes are included as pre-consumer recycled content. The figures provided represent our best estimate at the time of publication. For current recycled content figures please contact BlueScope Steel Direct on 1800 800 789.

<sup>8</sup> Warranties subject to exclusions, application, and eligibility criteria. For full terms and conditions visit [www.bluescopesteel.com.au/warranties](http://www.bluescopesteel.com.au/warranties).

## Environmental Product Declaration

TRUECORE® steel

# Declared Unit

This EPD is valid for one flat square metre (1 m<sup>2</sup>) of TRUECORE® steel manufactured by BlueScope in Australia.



### Product Description

TRUECORE® steel is a metallic coated steel product designed to be fabricated into light gauge steel framing specifically for use in residential and commercial structural framing applications.

This EPD sets out information on the average TRUECORE® steel product<sup>9</sup> manufactured by BlueScope in Australia, in the base metal thicknesses (BMTs) presented in the table below.

With their distinctive blue finish, the TRUECORE® steel products represented in this EPD consist of a low carbon<sup>10</sup> steel substrate that is coated with a metallic coating incorporating BlueScope's Activate® technology (hot dipped aluminium, zinc, and magnesium alloy AM150 coating) to provide enhanced corrosion resistance.

The metallic coated base steel (G450, G500 or G550 strength grade), conforms to AS 1397:2021: *Continuous hot-dip metallic coated steel sheet and strip - Coatings of zinc and zinc alloyed with aluminium and magnesium*.

TRUECORE® steel is made by BlueScope to strict tolerances, and conforms to AS/NZS 1365:1996 (R2016) *Tolerances for flat-rolled steel products*.

Product	Metallic Coating	Base Metal Thickness (BMT)	Product mass (kg/m <sup>2</sup> flat product)
TRUECORE® steel	AM150	0.42 mm	3.45
		0.48 mm	3.92
		0.55 mm	4.47
		0.60 mm	4.87
		0.75 mm	6.04
		0.95mm	7.61
		1.00 mm	8.01
		1.15 mm	9.18
		1.20 mm	9.58
		1.50 mm	11.93
		1.60 mm	12.72

### Manufacturing Process

In Australia, BlueScope manufactures steel from raw and recycled materials using an 'integrated steelmaking' method. This involves the use of iron ore, coal, steel scrap, fluxes (limestone and dolomite) and alloying materials to produce steel slab via the major processes of sintering, coke making, Blast Furnace/Basic Oxygen Furnace (BF-BOF) steelmaking and continuous slab casting, prior to hot rolling into hot rolled coil steel.

The hot rolled coil is then cold reduced. Cold reduction involves pickling (acid cleaning) the coil, followed by cold rolling, where the steel coil is compressed and elongated through rolls to reduce its thickness and increase the strength of the steel. Following cold reduction, the coil moves through a continuous hot-dipped metal coating line. At the metal coating line the steel is annealed to the required strength, metallic coated for corrosion resistance and then a chemical surface treatment and resin coating are applied to help protect the product through transportation, storage, rollforming and steel frame fabrication. The coil is then packaged ready for shipment to customers for processing.

### Downstream Processing

TRUECORE® steel is supplied by BlueScope to downstream processors in coil form. These coils are uncoiled, slit, and formed into roof, wall and floor framing components using rollforming machines.

To provide indicative results for the final formed product i.e., individual frame components prior to fabrication and assembly, data has been obtained from selected sites of several rollformers based in Australia, including Lysaght (all sites), Metroll (Perth, Albany and Bunbury sites) and Steeline (Hunter site). These results are presented as 'A1-A3 incl. rollforming' in the Results section. The indicative rollforming results represent an average of the data collected across the range of steel products formed from the surveyed sites<sup>11</sup>. These results may not be representative of the final formed product from any particular rollforming operation, company or site. Actual results will vary depending on a range of factors specific to the particular operations of the downstream processors.

### Product Content

The average composition<sup>12</sup> of one flat square metre (1 m<sup>2</sup>) of TRUECORE® steel is:

Product composition		Mass (kg)	Recycled material (pre- and post-consumer)
Steel Substrate	Carbon Steel	3.30 (0.42 mm) -12.56 (1.60 mm)	17.4% (average recycled content in the steel manufactured by BlueScope in Australia) <sup>13</sup>
	Aluminium	0.072-0.088	-
Metallic Coating (AM150)	Magnesium	0.002-0.005	-
	Silicon	0.002-0.003	-
	Zinc	0.059-0.079	-
Surface treatment	Passivation	<0.002	-
	Resin	<0.001	-

Packaging Materials	Mass (kg)	Packaging (as % of product mass)
Steel	0.012	0.09%-0.35%
Plastic	0.002	0.02%-0.06%
Cardboard	0.001	0.01%-0.03%
Timber	0.007	0.06%-0.20%

TRUECORE® steel is compliant with the European REACH regulation<sup>14</sup>. For safe use and maintenance information, refer to the product Safety Data Sheet (SDS) at [www.steel.com.au/library](http://www.steel.com.au/library).

### What is an SDS?

A Safety Data Sheet (SDS) is a document that describes the chemical and physical properties of a product or material and provides safe handling and use information.

### Industry Classification

Product	Classification	Code	Category
TRUECORE® steel	UN CPC	41231	Flat-rolled products of non-alloy steel, clad, plated, coated or otherwise further worked
	ANZSIC	2110	Iron Smelting and Steel Manufacturing

11. The indicative rollforming results provided are an average and variability among different products, operations, companies and sites is expected. Results are based on rollforming data corresponding to a 12 month period, which varied by rollformer (ranging from July 2018 to June 2021). Some of this data has been obtained from third parties. BlueScope does not accept any responsibility for the accuracy, completeness or reliability of data provided by third parties.

12. The product composition provided is an average and variability among individual products is expected. Please note that we are constantly working to improve our products and changes to their composition may occur over time. If clarification on a particular product is needed please contact BlueScope Steel Direct on 1800 800 789.


13. Across the range of steel products manufactured by BlueScope in Australia, the average recycled content (according to recycled content categories defined in ISO 14021:2016) in the steel is 17.4%, which includes pre- and post-consumer recycled materials. Scrap and iron-bearing materials generated and reclaimed from BlueScope's steelmaking, coating and painting operations represent an additional 6.8% recovered content, which is not reported as recycled content. Scrap from rollforming and fabrication processes are included as pre-consumer recycled content. The figures provided represent our best estimate at the time of publication. For current recycled content figures please contact BlueScope Steel Direct on 1800 800 789.

14. Regulation (EC) No. 1907/2006 of the European Parliament and of the Council of 18 December 2006 on the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH).

9. Refer to the TRUECORE® steel datasheet at [www.steel.com.au](http://www.steel.com.au)

10. The term 'low carbon steel' refers to the carbon content in the metal alloy (which is typically less than 0.3% carbon content), and not to the carbon dioxide (CO<sub>2</sub>) emissions associated with the product.

# TRUECORE® steel Manufacturing and Processing in Australia

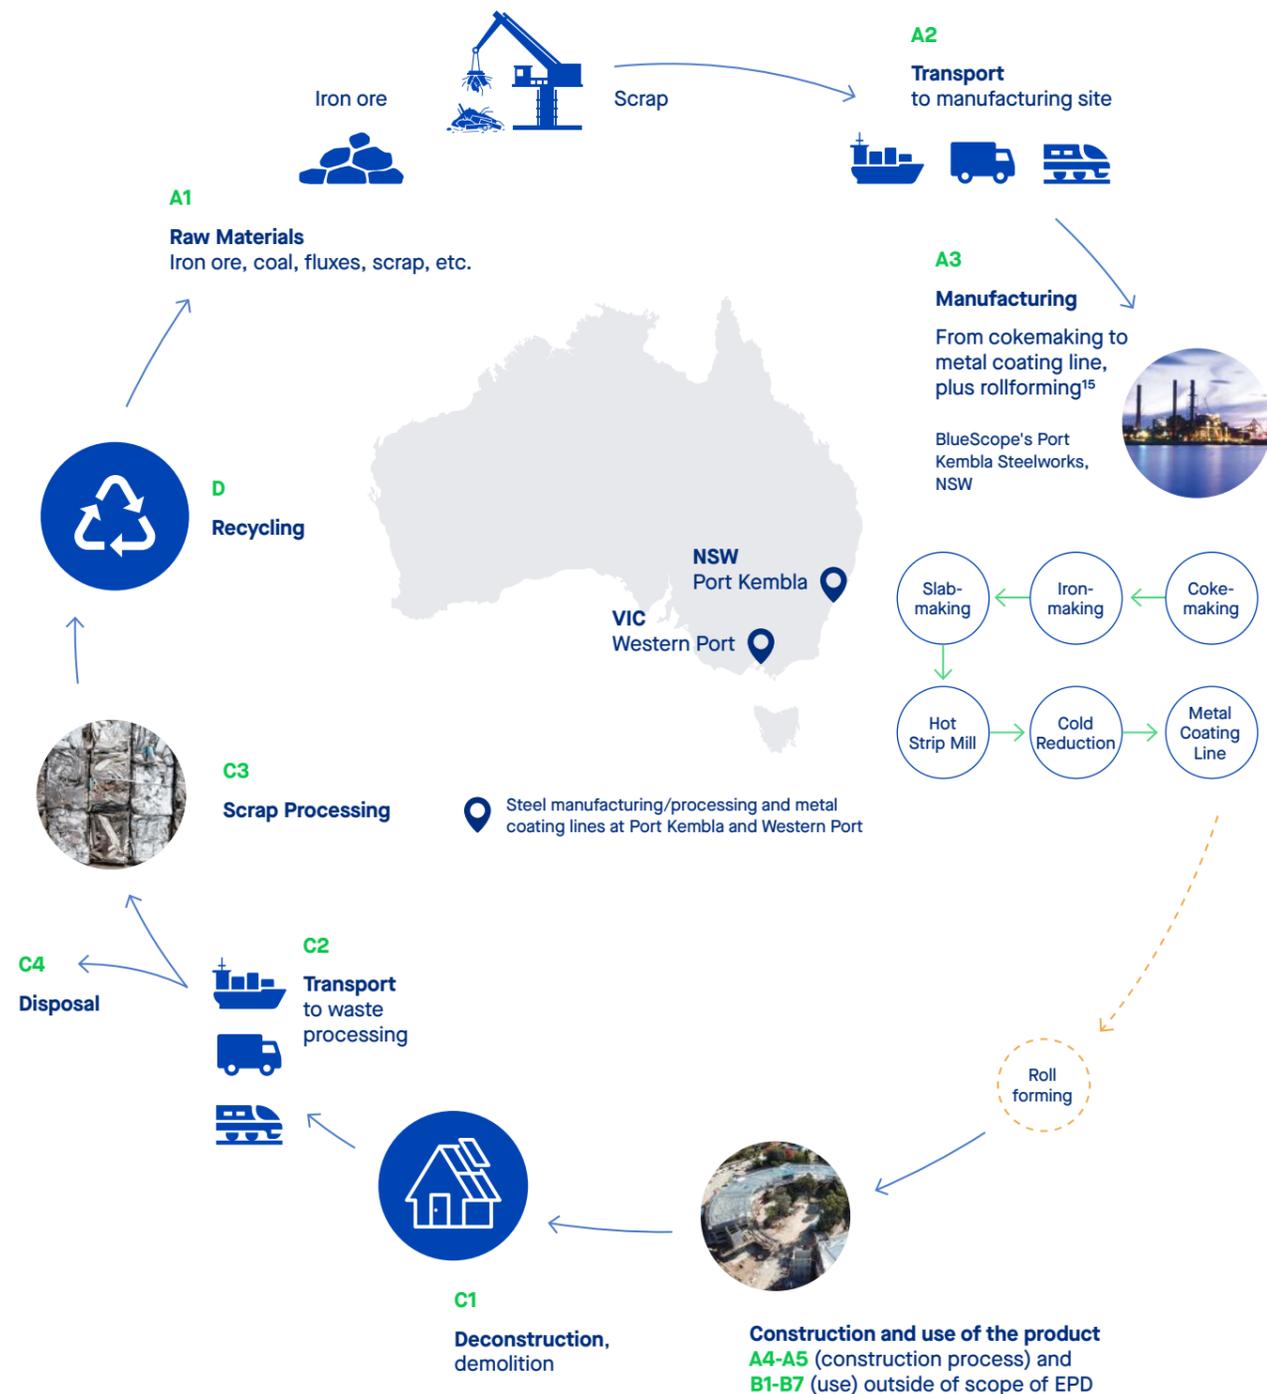

## Scope of Declaration

This declaration is for one flat square metre (1 m<sup>2</sup>) of TRUECORE® steel manufactured by BlueScope in Australia<sup>16</sup>. The scope of this declaration is from cradle to gate (modules A1-A3), with modules C1-C4 and module D. It includes an extension of the modules A1-A3 to include rollforming operations<sup>17</sup>.

**Modules A4-A5 (construction process) and B1-B7 (use) have not been included due to the inability to predict how the material will be used following manufacture.**

The system boundary applied in this study extends from mining of raw materials such as iron ore and coal; transport to and within the manufacturing site; coke, sinter, iron and steel manufacture; ancillary service operations; hot rolling of steel products, cold reduction, metallic coating and packaging for dispatch to direct customers at the exit gate of the manufacturing site.

The system boundary has been extended to include transport to the rollforming site, rollforming operations and packaging for dispatch to rollformers' customers at the exit gate of the rollforming site, presented as 'A1-A3 incl. rollforming' in the Results section. Processes such as slitting of coils and fabrication and assembly of frame components are excluded from the scope of this EPD.

The system boundary also includes manufacture of other required input materials, transport between processing operations, the production of external services such as electricity, natural gas and water, and the production of co-product materials within the steelmaking process, which have been removed by the use of allocation techniques. Wastes and emissions to air, land and water are also included, as are modules C1-C4 (end of life stage), and module D (reuse, recovery and/or recycling potential).

Modules	Product stage			Construction process stage		Use stage						End of life stage			Benefits and loads beyond the system boundary		
	Raw material supply	Transport	Manufacturing	Transport	Construction / installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction, demolition	Transport		Waste processing	Disposal
<b>Modules declared</b>	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
<b>Geography</b>	AU	AU	AU	-	-	-	-	-	-	-	-	-	AU	AU	AU	AU	GLO
<b>Specific data</b>	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Variation - products</b>	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Variation - sites</b>	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

X = Module declared; ND = Not declared (such a declaration shall not be regarded as an indicator of a zero result).

16. As described in the Product Description on page 16.

17. To provide indicative results for the final formed product (i.e. individual frame components) prior to fabrication and assembly, data has been obtained from selected sites of several rollformers based in Australia. Results are based on rollforming data corresponding to a 12 month period, which varied by rollformer (ranging from July 2018 to June 2021). The results represent an average of the data collected across the range of steel products formed from the surveyed sites. These results may not be representative of the final formed product from the rollforming operations of other companies or sites. Variability among different products, operations, companies and sites is expected. Actual results will vary depending on a range of factors specific to the particular operations of the downstream processors. Some of this data has been obtained from third parties. BlueScope does not accept any responsibility for the accuracy, completeness or reliability of data provided by third parties.

# Life Cycle Assessment (LCA) Methodology

This EPD has been produced in conformance with the requirements of PCR 2019:14 v1.11 Construction Products, the Instructions of the Australasian EPD Programme v3.0 and the International EPD® System General Programme Instructions (GPI) v3.01.

## Primary data

This study focuses on the further processing of steel beyond hot rolling to produce TRUECORE® steel. Upstream hot rolled steel manufacturing data for low carbon<sup>18</sup> Hot Rolled Coil used in this study was obtained from v2.0 of the EPD for Steel – Hot Rolled Coil (S-P-00557).

Primary data were collected for all relevant BlueScope manufacturing sites in Australia, for all inputs and outputs in the production stage (A1-A3). This study is based on an annual average for the time period July 2018 to June 2019. All direct emissions data were procured from the average results reported to the National Pollution Inventory over the 3-year period 2016 to 2019.

To provide indicative results for the final formed product (i.e. individual frame components prior to fabrication and assembly), primary data for rollforming were collected from selected sites of several rollformers based in Australia, including Lysaght (all sites), Metroll (Perth, Albany and Bunbury sites) and Steeline (Hunter sites). The data was collected across a 12 month period ranging from July 2018 to June 2021 for each site.

## Secondary data

The secondary data used were procured from the GaBi Life Cycle Inventory Database 2022<sup>19</sup>. Most datasets used have a reference year between 2018 and 2021 and all fall within the 10-year limit allowable for generic data under EN 15804.

For the modelling for BlueScope's manufacturing sites, the electricity supply was based on GaBi's state-specific 1kV-60kV grid mix datasets for NSW and VIC as relevant to each BlueScope manufacturing site.

The 2019 1kV-60kV NSW grid mix dataset is highly reliant on hard coal (77%), with imports from VIC (6.5%) and QLD (5.6%), and generation from hydro (4.1%), natural gas (3.3%), wind (2.5%) and photovoltaics (0.74%). The emission factor for the 2019 1kV-60kV NSW grid for the GWP-GHG indicator is 0.987 kg CO<sub>2</sub>-eq/kWh (GaBi database 2022).

The 2019 1kV-60kV VIC grid mix dataset is highly reliant on lignite (80%), with generation from hydro (6.3%), wind (6.2%), and natural gas (3.2%), and imports from TAS (2.4%), NSW (1.1%) and SA (0.68%). The emission factor for the 2019 1kV-60kV VIC grid for the GWP-GHG indicator is 1.13 kg CO<sub>2</sub>-eq/kWh (GaBi database 2022).

For the modelling for rollforming operations, GaBi state-specific grid mix datasets were used to create a production-weighted average grid mix, based on BlueScope's transport data to rollformers in different States, resulting in an emission factor for the GWP-GHG indicator of 0.942 kg CO<sub>2</sub>-eq/kWh.

Water use in relation to BlueScope's manufacturing sites was modelled using the specific watershed scarcity data for each BlueScope manufacturing site. For the rollforming operations, water use was modelled using the generic Australian water scarcity data for rollforming.

## Cut off criteria

All relevant and available data were collected. While cut-off criteria according to the Product Category Rules (PCR) section 4.4 were employed, much of the data which would have fallen within that scope were included where available, resulting in a data set which is robust and captures all significant contributors to the LCA results. Inputs knowingly excluded are the transport and packaging of minor inputs, such as lubricants and greases, which are used in very small quantities.

Personnel is excluded as per section 4.3.1 in the PCR (EPD International, 2021). thinkstep-anz consistently excludes environmental impacts from infrastructure, construction, production equipment, and tools that are not directly consumed in the production process ('capital goods'). This is because high-quality infrastructure-related data isn't always available and there is no clear cut-off for what to include. For this reason, capital goods data may be applied to LCA studies inconsistently and could lead to reduced consistency and comparability of EPDs.

## Allocation

For the modelling for BlueScope's manufacturing sites, where subdivision of processes was not possible, allocation was carried out using the most relevant physical quantity, predominantly the mass of throughput (e.g. steel coil) or surface area of the coil (e.g. surface coatings). Economic allocation was not used in this study. No use of system expansion was made (excepting Module D).

## End of life

The modelling for Module C1 (deconstruction, demolition) was based on the use of a 100 kW construction excavator (fuel consumption of 0.172 kg diesel per tonne steel). The modelling for Module C2 (transport) assumed 50 km transport by truck to a waste processing facility or landfill.

The recycling scenario was based on the National Waste Report 2020<sup>20</sup>, which indicates that the average metals recycling rate in Australia is 90%. This is considered to be a conservative estimate for flat steel construction products but was used in the absence of verified higher recycling rates.

End of life allocation follows the requirements of EN 15804:2012+A2:2019 section 6.4.3.3 and generally follows the polluter pays principle. Any open scrap inputs into manufacturing remain unconnected, and so are treated as 'burden free'. At the end of life of a product, scrap is collected for recycling and is thus available to produce a recycling credit within Module D. A credit for net scrap is given in Module D based on the base metal used in the product.

## Key assumptions and qualifications:

- Accuracy of data measurement falls within normal industrial weighing systems accuracy limits of +/-5%.
- Transport and packaging of minor materials is insignificant to the overall impacts.
- Nominally identical products are produced on a combination of production lines in parallel, and therefore the impacts of each product are a weighted average of the various production lines. The impact of any differences in the composition of the products, with the exception of any change in base metal thickness (BMT), is insignificant on the outcomes of the LCA.
- Proprietary chemicals and resins can be sufficiently modelled using guidance from Safety Data Sheets and conservative assumptions on that basis.
- Upstream data taken from the GaBi LCA database reflects average or generic production and therefore does not correspond to BlueScope's actual suppliers.
- Rollforming data has been obtained from selected sites of several rollformers based in Australia. Some of this data has been obtained from third parties. BlueScope does not accept any responsibility for the accuracy, completeness or reliability of data provided by third parties. The indicative rollforming results represent an average of the data collected across the range of steel products formed from the surveyed sites. The rollforming results may not be representative of the final formed product from any particular rollforming operation, company or site. Variability among different products, operations, companies and sites is expected. Actual results will vary depending on a range of factors specific to the particular operations of the downstream processors.
- The Module D recovery stage assumes that resin coatings are incinerated and metal coatings are lost as slag during the steel recycling process. This is a conservative assumption for metal coatings as they are likely to make up part of future steel alloys.

18. The term 'low carbon' steel refers to the carbon content in the metal alloy (which is typically less than 0.3% carbon content), and not to the carbon dioxide (CO<sub>2</sub>) emissions associated with the product.

19. Sphera, GaBi LCA Database Documentation, 2022, <https://www.gabi-software.com/support/gabi/gabi-database-2022-lci-documentation/>

20. Pickin J et al., National Waste Report 2020, Prepared for the Department of Agriculture, Water and the Environment, 2020, p.39.

# Environmental Performance

The environmental impact indicators included in this EPD are described in the table below. All the result tables from this point will contain the abbreviations only. All results reported in MJ are in net calorific value.

Indicator	Abbreviation	Units	Characterisation Method
<b>Core Environmental Impact indicators, in accordance to EN 15804:2012+A2:2019</b>			
Climate change – total	GWP-total	kg CO <sub>2</sub> -eq.	EF3.0 (PEF)
Climate change – fossil	GWP-fossil	kg CO <sub>2</sub> -eq.	EF3.0 (PEF)
Climate change – biogenic	GWP-biogenic	kg CO <sub>2</sub> -eq.	EF3.0 (PEF)
Climate change – land use and land use change	GWP-luluc	kg CO <sub>2</sub> -eq.	EF3.0 (PEF)
Ozone depletion	ODP	kg CFC-11-eq.	WMO 2014
Acidification	AP	mol H <sup>+</sup> -eq.	Accumulated Exceedance
Eutrophication aquatic freshwater	EP-freshwater	kg P-eq.	EUTREND model (ReCiPe)
Eutrophication aquatic marine	EP-marine	kg N-eq.	EUTREND model (ReCiPe)
Eutrophication terrestrial	EP-terrestrial	mol N-eq.	Accumulated Exceedance
Photochemical ozone formation	POCP	kg NMVOC-eq.	LOTOS-EUROS
Depletion of abiotic resources – minerals and metals	ADP-minerals & metals	kg Sb-eq.	CML 2002a
Depletion of abiotic resources – fossil fuels	ADP-fossil	MJ	CML 2002a
Water depletion potential	WDP	m <sup>3</sup> world-eq. deprived	AWARE
<b>Additional Environmental Impact indicators, in accordance to EN 15804:2012+A2:2019</b>			
Climate change	GWP-GHG	kg CO <sub>2</sub> -eq.	IPCC 2013 (AR5)
Particulate Matter emissions	PM	Disease incidence	SETAC-UNEP, Fantke et al. 2016
Ionising radiation – human health	IRP	kBq U-235-eq.	Human Health Effect model
Eco-toxicity – freshwater	ETP-fw	CTUe	Modified USEtox model from EC-JRC
Human toxicity potential – cancer effects	HTP-c	CTUh	Modified USEtox model from EC-JRC
Human toxicity potential – non-cancer effects	HTP-nc	CTUh	Modified USEtox model from EC-JRC
Land use related impacts / soil quality	SQP	dimensionless	Soil quality index (LANCA®)
<b>Resource use parameters</b>			
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	PERE	MJ	n/a
Use of renewable primary energy resources used as raw materials	PERM	MJ	n/a
Total use of renewable primary energy resources	PERT	MJ	n/a
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	PENRE	MJ	n/a
Use of non-renewable primary energy resources used as raw materials	PENRM	MJ	n/a
Total use of non-renewable primary energy resources	PENRT	MJ	n/a
Use of secondary material	SM	kg	n/a
Use of renewable secondary fuels	RSF	MJ	n/a
Use of non-renewable secondary fuels	NRSF	MJ	n/a
Net use of fresh water	FW	m <sup>3</sup>	n/a

<b>Waste Categories and Output Flows</b>			
Hazardous waste disposed	HWD	kg	n/a
Non-hazardous waste disposed	NHWD	kg	n/a
Radioactive waste disposed	RWD	kg	n/a
Components for re-use	CRU	kg	n/a
Materials for recycling	MFR	kg	n/a
Materials for energy recovery	MER	kg	n/a
Exported energy – electrical	EEE	MJ	n/a
Exported energy – thermal	EET	MJ	n/a
<b>Additional Environmental Impact indicators, in accordance to EN 15804:2012+A1:2013</b>			
Global warming potential	GWP	kg CO <sub>2</sub> -eq.	IPCC 2007 (AR4)
Ozone depletion potential	ODP	kg CFC-11-eq.	WMO 2003
Acidification potential	AP	kg SO <sub>2</sub> -eq.	CML 2002b
Eutrophication potential	EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	CML 2002b
Photochemical ozone creation potential	POCP	kg C <sub>2</sub> H <sub>4</sub> -eq.	CML 2002b
Abiotic depletion potential for non-fossil resources	ADPE	kg Sb-eq.	CML 2002b
Abiotic depletion potential for fossil resources	ADPF	MJ	CML 2002b
<b>Additional Green Star v1.3 indicators</b>			
Human Toxicity – cancer effects	HTc - GS	CTUh	USEtox
Human Toxicity - non-cancer effects	HTnc - GS	CTUh	USEtox
Land use	LU - GS	kg C deficit-eq.	Soil Organic Matter method
Resource depletion – water	RDW - GS	m <sup>3</sup> -eq.	Water Stress Indicator
Ionising radiation	IR – GS	kBq U235-eq.	Human Health Effect model
Particulate matter	PM - GS	kg PM2.5-eq.	RiskPoll

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.42mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 3.45 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	11.2	11.5	0.00216	0.0164	0.152	0.0167	-3.89
GWP-fossil	kg CO <sub>2</sub> -eq.	11.2	11.6	0.00216	0.0164	0.152	0.0167	-3.89
GWP-biogenic	kg CO <sub>2</sub> -eq.	-0.00335	-0.0927	2.13E-07	5.46E-06	1.70E-04	3.29E-05	0.00231
GWP-luluc	kg CO <sub>2</sub> -eq.	4.80E-04	9.00E-04	1.57E-08	1.76E-07	5.83E-06	1.00E-05	-7.81E-05
ODP	kg CFC-11-eq.	6.25E-12	6.98E-12	1.71E-16	1.64E-15	6.76E-13	2.19E-14	6.54E-14
AP	mol H <sup>+</sup> -eq.	0.0394	0.0410	1.02E-05	4.22E-05	7.64E-04	5.26E-05	-0.00376
EP-freshwater	kg P-eq.	2.78E-06	3.88E-06	3.79E-10	2.69E-09	8.30E-08	1.28E-08	-6.92E-07
EP-marine	kg N-eq.	0.00842	0.00885	4.95E-06	1.91E-05	1.64E-04	1.28E-05	-2.62E-04
EP-terrestrial	mol N-eq.	0.0944	0.0990	5.42E-05	2.10E-04	0.00179	1.41E-04	4.54E-04
POCP	kg NMVOC-eq.	0.0280	0.0293	1.39E-05	4.08E-05	4.54E-04	4.06E-05	-0.00266
ADP-minerals & metals <sup>21</sup>	kg Sb-eq.	4.11E-05	4.19E-05	2.63E-11	2.95E-10	1.27E-08	1.16E-09	-1.96E-07
ADP-fossil <sup>21</sup>	MJ	113	118	0.0286	0.217	1.64	0.237	-35.2
WDP <sup>21</sup>	m <sup>3</sup> world-eq. deprived	0.915	0.979	1.60E-05	1.04E-04	0.0594	0.00113	-0.747

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>22</sup>	kg CO <sub>2</sub> -eq.	10.9	11.4	0.00213	0.0162	0.151	0.0162	-3.74
PM	Disease incidence	5.04E-07	5.23E-07	1.16E-10	2.77E-10	7.44E-09	5.63E-10	-4.15E-08
IRP <sup>23</sup>	kBq U-235-eq.	0.156	0.160	5.43E-08	5.51E-06	2.87E-05	4.21E-04	0.0916
ETP-fw <sup>21</sup>	CTUe	19.7	21.0	0.00719	0.0870	0.314	0.0702	-1.11
HTP-c <sup>21</sup>	CTUh	1.37E-09	1.45E-09	1.21E-13	1.47E-12	1.41E-11	8.32E-12	-1.63E-09
HTP-nc <sup>21</sup>	CTUh	2.05E-07	2.12E-07	7.54E-12	5.83E-11	4.68E-10	8.38E-10	-5.34E-08
SQP <sup>21</sup>	dimensionless	4.76	7.96	6.57E-05	6.12E-04	0.210	0.0184	0.479

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	9.18	10.5	9.35E-05	0.00106	0.353	0.0193	2.39
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	9.18	10.5	9.35E-05	0.00106	0.353	0.0193	2.39
PENRE	MJ	113	118	0.0286	0.217	1.64	0.237	-35.2
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	113	118	0.0286	0.217	1.64	0.237	-35.2
SM	kg	0.649	0.661	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0257	0.0271	2.41E-07	2.07E-06	8.35E-04	3.33E-05	-0.0169

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	3.81E-09	1.05E-08	3.11E-14	3.52E-13	5.49E-11	3.57E-11	-2.64E-10
NHWD	kg	0.282	0.295	4.09E-07	5.26E-06	5.13E-04	0.346	0.686
RWD	kg	8.63E-04	8.87E-04	4.19E-10	4.24E-08	2.24E-07	2.85E-06	7.40E-06
CRU	kg	0	0	0	0	0	0	0
MFR	kg	1.40	1.43	0	0	3.11	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	3.11
Steel collected with mixed construction waste	kg	0.345
Recovery for re-use	kg	0
Recovery for recycling	kg	3.11
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.345
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0315

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.42mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	10.9	11.2	0.00212	0.0161	0.150	0.0158	-3.70
ODP	kg CFC11-eq.	7.38E-12	8.29E-12	2.02E-16	1.93E-15	7.96E-13	2.58E-14	7.56E-14
AP	kg SO <sub>2</sub> -eq.	0.0319	0.0332	7.12E-06	2.97E-05	6.25E-04	4.23E-05	-0.00345
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00302	0.00319	1.66E-06	6.46E-06	5.63E-05	4.51E-06	-8.81E-05
POCP	kg ethene-eq.	0.00462	0.00476	7.03E-07	-7.89E-06	3.35E-05	3.94E-06	-0.00167
ADPE	kg Sb-eq.	4.11E-05	4.19E-05	2.63E-11	2.95E-10	1.27E-08	1.18E-09	-1.90E-07
ADPF	MJ	110	115	0.0286	0.216	1.63	0.228	-36.2

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	2.67E-10	2.82E-10	3.27E-15	4.50E-14	5.44E-12	7.27E-13	6.86E-11
HTnc - GS	CTUh	8.13E-11	3.42E-10	1.56E-15	1.01E-14	1.73E-13	1.69E-14	1.91E-12
LU - GS	kg C deficit-eq.	1.24	1.43	5.43E-06	4.20E-05	0.0171	0.00160	0.199
RDW - GS	m <sup>3</sup> -eq.	0.0111	0.0119	1.55E-07	1.31E-06	5.55E-04	1.68E-05	-0.00923
IR - GS	kBq U235-eq.	0.156	0.160	5.43E-08	5.51E-06	2.87E-05	4.21E-04	0.0916
PM - GS	kg PM2.5-eq.	0.00263	0.00273	5.11E-07	1.39E-06	4.10E-05	2.98E-06	-2.70E-04

21. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

22. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

23. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.48mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 3.92 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	12.4	12.8	0.00245	0.0186	0.173	0.0190	-4.44
GWP-fossil	kg CO <sub>2</sub> -eq.	12.4	12.9	0.00245	0.0186	0.173	0.0190	-4.44
GWP-biogenic	kg CO <sub>2</sub> -eq.	-0.00298	-0.105	2.43E-07	6.20E-06	1.93E-04	3.74E-05	0.00262
GWP-luluc	kg CO <sub>2</sub> -eq.	4.98E-04	9.74E-04	1.78E-08	2.00E-07	6.63E-06	1.14E-05	-8.97E-05
ODP	kg CFC-11-eq.	6.67E-12	7.49E-12	1.95E-16	1.87E-15	7.68E-13	2.49E-14	7.31E-14
AP	mol H <sup>+</sup> -eq.	0.0434	0.0453	1.16E-05	4.80E-05	8.68E-04	5.98E-05	-0.00433
EP-freshwater	kg P-eq.	2.96E-06	4.21E-06	4.31E-10	3.06E-09	9.44E-08	1.45E-08	-7.92E-07
EP-marine	kg N-eq.	0.00931	0.00980	5.63E-06	2.17E-05	1.86E-04	1.46E-05	-3.09E-04
EP-terrestrial	mol N-eq.	0.105	0.110	6.16E-05	2.39E-04	0.00203	1.60E-04	4.13E-04
POCP	kg NMVOC-eq.	0.0311	0.0325	1.58E-05	4.63E-05	5.16E-04	4.61E-05	-0.00307
ADP-minerals & metals <sup>24</sup>	kg Sb-eq.	4.12E-05	4.20E-05	2.99E-11	3.35E-10	1.45E-08	1.32E-09	-2.24E-07
ADP-fossil <sup>24</sup>	MJ	124	130	0.0325	0.247	1.87	0.269	-40.2
WDP <sup>24</sup>	m <sup>3</sup> world-eq. deprived	0.968	1.04	1.82E-05	1.18E-04	0.0675	0.00129	-0.854

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>25</sup>	kg CO <sub>2</sub> -eq.	12.1	12.6	0.00242	0.0184	0.171	0.0184	-4.28
PM	Disease incidence	5.58E-07	5.80E-07	1.32E-10	3.14E-10	8.46E-09	6.40E-10	-4.80E-08
IRP <sup>26</sup>	kBq U-235-eq.	0.158	0.162	6.17E-08	6.26E-06	3.26E-05	4.78E-04	0.105
ETP-fw <sup>24</sup>	CTUe	21.2	22.7	0.00817	0.0989	0.356	0.0798	-1.28
HTP-c <sup>24</sup>	CTUh	1.47E-09	1.55E-09	1.37E-13	1.67E-12	1.60E-11	9.45E-12	-1.86E-09
HTP-nc <sup>24</sup>	CTUh	2.30E-07	2.38E-07	8.56E-12	6.63E-11	5.32E-10	9.52E-10	-6.10E-08
SQP <sup>24</sup>	dimensionless	5.06	8.68	7.47E-05	6.96E-04	0.239	0.0209	0.546

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	9.49	11.0	1.06E-04	0.00121	0.402	0.0220	2.73
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	9.49	11.0	1.06E-04	0.00121	0.402	0.0220	2.73
PENRE	MJ	124	130	0.0325	0.247	1.87	0.269	-40.3
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	125	130	0.0325	0.247	1.87	0.269	-40.3
SM	kg	0.740	0.754	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0266	0.0283	2.74E-07	2.35E-06	9.49E-04	3.79E-05	-0.0193

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	4.02E-09	1.16E-08	3.53E-14	4.00E-13	6.24E-11	4.06E-11	-3.03E-10
NHWD	kg	0.287	0.300	4.65E-07	5.98E-06	5.82E-04	0.393	0.766
RWD	kg	8.74E-04	8.99E-04	4.77E-10	4.82E-08	2.54E-07	3.24E-06	8.29E-06
CRU	kg	0	0	0	0	0	0	0
MFR	kg	1.60	1.63	0	0	3.53	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	3.53
Steel collected with mixed construction waste	kg	0.392
Recovery for re-use	kg	0
Recovery for recycling	kg	3.53
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.392
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0354

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

# Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.48mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	12.1	12.5	0.00241	0.0183	0.170	0.0180	-4.23
ODP	kg CFC11-eq.	7.88E-12	8.89E-12	2.29E-16	2.20E-15	9.04E-13	2.94E-14	8.45E-14
AP	kg SO <sub>2</sub> -eq.	0.0351	0.0366	8.09E-06	3.38E-05	7.10E-04	4.80E-05	-0.00398
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00335	0.00353	1.88E-06	7.34E-06	6.40E-05	5.12E-06	-1.04E-04
POCP	kg ethene-eq.	0.00518	0.00534	7.98E-07	-8.97E-06	3.80E-05	4.48E-06	-0.00190
ADPE	kg Sb-eq.	4.12E-05	4.20E-05	2.99E-11	3.35E-10	1.45E-08	1.34E-09	-2.17E-07
ADPF	MJ	121	127	0.0325	0.246	1.86	0.260	-41.3

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	2.75E-10	2.92E-10	3.72E-15	5.12E-14	6.18E-12	8.27E-13	7.84E-11
HTnc - GS	CTUh	8.63E-11	3.83E-10	1.78E-15	1.15E-14	1.97E-13	1.92E-14	2.18E-12
LU - GS	kg C deficit-eq.	1.38	1.59	6.17E-06	4.77E-05	0.0194	0.00182	0.228
RDW - GS	m <sup>3</sup> -eq.	0.0117	0.0126	1.76E-07	1.49E-06	6.31E-04	1.90E-05	-0.0105
IR - GS	kBq U235-eq.	0.158	0.162	6.17E-08	6.26E-06	3.26E-05	4.78E-04	0.105
PM - GS	kg PM2.5-eq.	0.00291	0.00302	5.81E-07	1.58E-06	4.65E-05	3.38E-06	-3.12E-04

24. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

25. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

26. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.55mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 4.47 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	13.9	14.3	0.00279	0.0212	0.197	0.0217	-5.09
GWP-fossil	kg CO <sub>2</sub> -eq.	13.9	14.4	0.00279	0.0212	0.197	0.0216	-5.09
GWP-biogenic	kg CO <sub>2</sub> -eq.	-0.00254	-0.118	2.77E-07	7.07E-06	2.20E-04	4.27E-05	0.00299
GWP-luluc	kg CO <sub>2</sub> -eq.	5.19E-04	0.00106	2.03E-08	2.28E-07	7.55E-06	1.30E-05	-1.03E-04
ODP	kg CFC-11-eq.	7.16E-12	8.08E-12	2.22E-16	2.13E-15	8.76E-13	2.84E-14	8.22E-14
AP	mol H <sup>+</sup> -eq.	0.0481	0.0503	1.33E-05	5.47E-05	9.90E-04	6.82E-05	-0.00500
EP-freshwater	kg P-eq.	3.16E-06	4.59E-06	4.91E-10	3.49E-09	1.08E-07	1.66E-08	-9.08E-07
EP-marine	kg N-eq.	0.0104	0.0109	6.41E-06	2.47E-05	2.12E-04	1.66E-05	-3.64E-04
EP-terrestrial	mol N-eq.	0.116	0.122	7.03E-05	2.72E-04	0.00232	1.82E-04	3.66E-04
POCP	kg NMVOC-eq.	0.0347	0.0363	1.80E-05	5.28E-05	5.88E-04	5.26E-05	-0.00355
ADP-minerals & metals <sup>27</sup>	kg Sb-eq.	4.12E-05	4.21E-05	3.41E-11	3.82E-10	1.65E-08	1.51E-09	-2.57E-07
ADP-fossil <sup>27</sup>	MJ	138	145	0.0371	0.281	2.13	0.306	-46.1
WDP <sup>27</sup>	m <sup>3</sup> world-eq. deprived	1.03	1.11	2.07E-05	1.34E-04	0.0770	0.00147	-0.978

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>28</sup>	kg CO <sub>2</sub> -eq.	13.5	14.1	0.00276	0.0210	0.195	0.0210	-4.90
PM	Disease incidence	6.21E-07	6.45E-07	1.50E-10	3.58E-10	9.64E-09	7.29E-10	-5.56E-08
IRP <sup>29</sup>	kBq U-235-eq.	0.160	0.164	7.04E-08	7.14E-06	3.72E-05	5.45E-04	0.120
ETP-fw <sup>27</sup>	CTUe	22.9	24.6	0.00932	0.113	0.406	0.0909	-1.48
HTP-c <sup>27</sup>	CTUh	1.58E-09	1.67E-09	1.56E-13	1.90E-12	1.82E-11	1.08E-11	-2.14E-09
HTP-nc <sup>27</sup>	CTUh	2.59E-07	2.68E-07	9.76E-12	7.55E-11	6.06E-10	1.09E-09	-7.00E-08
SQP <sup>27</sup>	dimensionless	5.40	9.53	8.51E-05	7.93E-04	0.272	0.0238	0.624

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	9.85	11.5	1.21E-04	0.00137	0.458	0.0250	3.13
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	9.85	11.5	1.21E-04	0.00137	0.458	0.0250	3.13
PENRE	MJ	138	145	0.0371	0.281	2.13	0.307	-46.1
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	138	145	0.0371	0.281	2.13	0.307	-46.1
SM	kg	0.847	0.862	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0278	0.0296	3.12E-07	2.68E-06	0.00108	4.32E-05	-0.0221

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	4.26E-09	1.29E-08	4.02E-14	4.56E-13	7.11E-11	4.63E-11	-3.49E-10
NHWD	kg	0.292	0.307	5.30E-07	6.82E-06	6.64E-04	0.448	0.860
RWD	kg	8.86E-04	9.14E-04	5.43E-10	5.49E-08	2.90E-07	3.69E-06	9.34E-06
CRU	kg	0	0	0	0	0	0	0
MFR	kg	1.83	1.87	0	0	4.03	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	4.03
Steel collected with mixed construction waste	kg	0.447
Recovery for re-use	kg	0
Recovery for recycling	kg	4.03
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.447
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0399

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

# Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.55mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	13.5	13.9	0.00275	0.0209	0.194	0.0205	-4.84
ODP	kg CFC11-eq.	8.45E-12	9.60E-12	2.61E-16	2.51E-15	1.03E-12	3.35E-14	9.49E-14
AP	kg SO <sub>2</sub> -eq.	0.0389	0.0406	9.23E-06	3.85E-05	8.09E-04	5.47E-05	-0.00459
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00373	0.00394	2.15E-06	8.37E-06	7.30E-05	5.84E-06	-1.22E-04
POCP	kg ethene-eq.	0.00583	0.00602	9.10E-07	-1.02E-05	4.34E-05	5.11E-06	-0.00218
ADPE	kg Sb-eq.	4.12E-05	4.21E-05	3.41E-11	3.82E-10	1.65E-08	1.53E-09	-2.48E-07
ADPF	MJ	135	141	0.0371	0.280	2.12	0.296	-47.4

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	2.84E-10	3.04E-10	4.24E-15	5.84E-14	7.05E-12	9.42E-13	8.97E-11
HTnc - GS	CTUh	9.20E-11	4.30E-10	2.03E-15	1.31E-14	2.25E-13	2.19E-14	2.50E-12
LU - GS	kg C deficit-eq.	1.53	1.78	7.03E-06	5.44E-05	0.0221	0.00208	0.260
RDW - GS	m <sup>3</sup> -eq.	0.0124	0.0134	2.01E-07	1.70E-06	7.19E-04	2.17E-05	-0.0121
IR - GS	kBq U235-eq.	0.160	0.164	7.04E-08	7.14E-06	3.72E-05	5.45E-04	0.120
PM - GS	kg PM2.5-eq.	0.00323	0.00336	6.63E-07	1.80E-06	5.31E-05	3.86E-06	-3.60E-04

27. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

28. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

29. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.60mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 4.87 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	14.9	15.4	0.00304	0.0231	0.214	0.0236	-5.55
GWP-fossil	kg CO <sub>2</sub> -eq.	14.9	15.5	0.00304	0.0231	0.214	0.0235	-5.56
GWP-biogenic	kg CO <sub>2</sub> -eq.	-0.00222	-0.128	3.01E-07	7.69E-06	2.39E-04	4.64E-05	0.00325
GWP-luluc	kg CO <sub>2</sub> -eq.	5.34E-04	0.00112	2.21E-08	2.48E-07	8.22E-06	1.41E-05	-1.13E-04
ODP	kg CFC-11-eq.	7.51E-12	8.51E-12	2.41E-16	2.31E-15	9.52E-13	3.09E-14	8.86E-14
AP	mol H <sup>+</sup> -eq.	0.0515	0.0538	1.44E-05	5.95E-05	0.00108	7.42E-05	-0.00547
EP-freshwater	kg P-eq.	3.31E-06	4.86E-06	5.34E-10	3.79E-09	1.17E-07	1.80E-08	-9.91E-07
EP-marine	kg N-eq.	0.0111	0.0117	6.98E-06	2.69E-05	2.31E-04	1.81E-05	-4.03E-04
EP-terrestrial	mol N-eq.	0.125	0.131	7.64E-05	2.96E-04	0.00252	1.98E-04	3.31E-04
POCP	kg NMVOC-eq.	0.0372	0.0390	1.95E-05	5.74E-05	6.40E-04	5.72E-05	-0.00388
ADP-minerals & metals <sup>30</sup>	kg Sb-eq.	4.13E-05	4.21E-05	3.71E-11	4.15E-10	1.80E-08	1.64E-09	-2.80E-07
ADP-fossil <sup>30</sup>	MJ	148	155	0.0403	0.306	2.31	0.333	-50.3
WDP <sup>30</sup>	m <sup>3</sup> world-eq. deprived	1.08	1.16	2.26E-05	1.46E-04	0.0837	0.00159	-1.07

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>31</sup>	kg CO <sub>2</sub> -eq.	14.5	15.2	0.00301	0.0228	0.212	0.0228	-5.35
PM	Disease incidence	6.66E-07	6.92E-07	1.63E-10	3.90E-10	1.05E-08	7.93E-10	-6.10E-08
IRP <sup>32</sup>	kBq U-235-eq.	0.161	0.166	7.65E-08	7.77E-06	4.05E-05	5.93E-04	0.131
ETP-fw <sup>30</sup>	CTUe	24.2	26.0	0.0101	0.123	0.442	0.0989	-1.62
HTP-c <sup>30</sup>	CTUh	1.65E-09	1.76E-09	1.70E-13	2.07E-12	1.98E-11	1.17E-11	-2.33E-09
HTP-nc <sup>30</sup>	CTUh	2.80E-07	2.89E-07	1.06E-11	8.22E-11	6.59E-10	1.18E-09	-7.63E-08
SQP <sup>30</sup>	dimensionless	5.64	10.1	9.26E-05	8.63E-04	0.296	0.0259	0.680

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	10.1	11.9	1.32E-04	0.00149	0.498	0.0272	3.41
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	10.1	11.9	1.32E-04	0.00149	0.498	0.0272	3.41
PENRE	MJ	148	155	0.0403	0.306	2.31	0.333	-50.3
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	148	155	0.0403	0.306	2.31	0.333	-50.3
SM	kg	0.922	0.939	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0286	0.0305	3.40E-07	2.91E-06	0.00118	4.70E-05	-0.0242

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	4.43E-09	1.38E-08	4.38E-14	4.96E-13	7.73E-11	5.04E-11	-3.82E-10
NHWD	kg	0.296	0.311	5.76E-07	7.42E-06	7.22E-04	0.487	0.927
RWD	kg	8.95E-04	9.24E-04	5.91E-10	5.97E-08	3.16E-07	4.02E-06	1.01E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	2.00	2.03	0	0	4.38	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	4.38
Steel collected with mixed construction waste	kg	0.487
Recovery for re-use	kg	0
Recovery for recycling	kg	4.38
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.487
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0432

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.60mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	14.5	14.9	0.00299	0.0228	0.211	0.0223	-5.28
ODP	kg CFC11-eq.	8.86E-12	1.01E-11	2.84E-16	2.72E-15	1.12E-12	3.64E-14	1.02E-13
AP	kg SO <sub>2</sub> -eq.	0.0416	0.0435	1.00E-05	4.19E-05	8.80E-04	5.95E-05	-0.00502
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00400	0.00422	2.34E-06	9.11E-06	7.94E-05	6.35E-06	-1.35E-04
POCP	kg ethene-eq.	0.00630	0.00650	9.90E-07	-1.11E-05	4.72E-05	5.56E-06	-0.00238
ADPE	kg Sb-eq.	4.13E-05	4.21E-05	3.71E-11	4.16E-10	1.80E-08	1.66E-09	-2.71E-07
ADPF	MJ	145	151	0.0403	0.305	2.30	0.322	-51.7

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	2.91E-10	3.12E-10	4.61E-15	6.35E-14	7.67E-12	1.02E-12	9.78E-11
HTnc - GS	CTUh	9.62E-11	4.63E-10	2.20E-15	1.43E-14	2.44E-13	2.39E-14	2.72E-12
LU - GS	kg C deficit-eq.	1.64	1.91	7.65E-06	5.91E-05	0.0241	0.00226	0.284
RDW - GS	m <sup>3</sup> -eq.	0.0129	0.0140	2.19E-07	1.85E-06	7.82E-04	2.36E-05	-0.0132
IR - GS	kBq U235-eq.	0.161	0.166	7.65E-08	7.76E-06	4.05E-05	5.93E-04	0.131
PM - GS	kg PM2.5-eq.	0.00346	0.00360	7.21E-07	1.96E-06	5.77E-05	4.19E-06	-3.94E-04

30. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

31. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

32. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.75mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 6.04 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	18.0	18.6	0.00377	0.0287	0.266	0.0293	-6.94
GWP-fossil	kg CO <sub>2</sub> -eq.	18.0	18.7	0.00377	0.0286	0.266	0.0292	-6.95
GWP-biogenic	kg CO <sub>2</sub> -eq.	-0.00129	-0.158	3.74E-07	9.55E-06	2.97E-04	5.76E-05	0.00404
GWP-luluc	kg CO <sub>2</sub> -eq.	5.79E-04	0.00131	2.74E-08	3.08E-07	1.02E-05	1.76E-05	-1.42E-04
ODP	kg CFC-11-eq.	8.55E-12	9.78E-12	3.00E-16	2.87E-15	1.18E-12	3.84E-14	1.08E-13
AP	mol H <sup>+</sup> -eq.	0.0616	0.0644	1.79E-05	7.39E-05	0.00134	9.21E-05	-0.00691
EP-freshwater	kg P-eq.	3.76E-06	5.67E-06	6.63E-10	4.71E-09	1.45E-07	2.24E-08	-1.24E-06
EP-marine	kg N-eq.	0.0133	0.0141	8.67E-06	3.34E-05	2.87E-04	2.24E-05	-5.21E-04
EP-terrestrial	mol N-eq.	0.150	0.158	9.49E-05	3.67E-04	0.00313	2.46E-04	2.29E-04
POCP	kg NMVOC-eq.	0.0449	0.0471	2.43E-05	7.13E-05	7.95E-04	7.10E-05	-0.00490
ADP-minerals & metals <sup>33</sup>	kg Sb-eq.	4.14E-05	4.22E-05	4.61E-11	5.16E-10	2.23E-08	2.04E-09	-3.50E-07
ADP-fossil <sup>33</sup>	MJ	177	186	0.0501	0.380	2.87	0.414	-62.9
WDP <sup>33</sup>	m <sup>3</sup> world-eq. deprived	1.21	1.31	2.80E-05	1.81E-04	0.104	0.00198	-1.33

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>34</sup>	kg CO <sub>2</sub> -eq.	17.5	18.3	0.00373	0.0284	0.264	0.0283	-6.68
PM	Disease incidence	8.01E-07	8.33E-07	2.03E-10	4.84E-10	1.30E-08	9.85E-10	-7.73E-08
IRP <sup>35</sup>	kBq U-235-eq.	0.166	0.171	9.51E-08	9.64E-06	5.03E-05	7.37E-04	0.163
ETP-fw <sup>33</sup>	CTUe	27.9	30.1	0.0126	0.152	0.549	0.123	-2.04
HTP-c <sup>33</sup>	CTUh	1.89E-09	2.02E-09	2.11E-13	2.57E-12	2.46E-11	1.46E-11	-2.91E-09
HTP-nc <sup>33</sup>	CTUh	3.42E-07	3.54E-07	1.32E-11	1.02E-10	8.19E-10	1.47E-09	-9.55E-08
SQP <sup>33</sup>	dimensionless	6.38	11.9	1.15E-04	0.00107	0.368	0.0322	0.848

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	10.9	13.1	1.64E-04	0.00186	0.618	0.0338	4.26
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	10.9	13.1	1.64E-04	0.00186	0.618	0.0338	4.26
PENRE	MJ	177	186	0.0501	0.380	2.87	0.414	-62.9
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	177	186	0.0501	0.380	2.87	0.414	-62.9
SM	kg	1.15	1.17	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0311	0.0334	4.22E-07	3.62E-06	0.00146	5.83E-05	-0.0302

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	4.96E-09	1.66E-08	5.43E-14	6.16E-13	9.61E-11	6.25E-11	-4.81E-10
NHWD	kg	0.306	0.325	7.16E-07	9.21E-06	8.97E-04	0.605	1.13
RWD	kg	9.23E-04	9.55E-04	7.34E-10	7.42E-08	3.92E-07	4.99E-06	1.23E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	2.49	2.54	0	0	5.44	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	5.44
Steel collected with mixed construction waste	kg	0.604
Recovery for re-use	kg	0
Recovery for recycling	kg	5.44
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.604
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0530

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.75mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	17.4	18.0	0.00372	0.0283	0.262	0.0277	-6.60
ODP	kg CFC11-eq.	1.01E-11	1.16E-11	3.53E-16	3.38E-15	1.39E-12	4.52E-14	1.25E-13
AP	kg SO <sub>2</sub> -eq.	0.0498	0.0520	1.25E-05	5.20E-05	0.00109	7.40E-05	-0.00633
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00480	0.00509	2.90E-06	1.13E-05	9.86E-05	7.89E-06	-1.75E-04
POCP	kg ethene-eq.	0.00770	0.00794	1.23E-06	-1.38E-05	5.86E-05	6.90E-06	-0.00298
ADPE	kg Sb-eq.	4.14E-05	4.23E-05	4.61E-11	5.16E-10	2.23E-08	2.07E-09	-3.39E-07
ADPF	MJ	174	182	0.0501	0.379	2.86	0.400	-64.6

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	3.12E-10	3.37E-10	5.72E-15	7.88E-14	9.52E-12	1.27E-12	1.22E-10
HTnc - GS	CTUh	1.09E-10	5.64E-10	2.74E-15	1.77E-14	3.03E-13	2.96E-14	3.40E-12
LU - GS	kg C deficit-eq.	1.97	2.30	9.50E-06	7.35E-05	0.0299	0.00280	0.355
RDW - GS	m <sup>3</sup> -eq.	0.0143	0.0156	2.72E-07	2.30E-06	9.71E-04	2.93E-05	-0.0165
IR - GS	kBq U235-eq.	0.166	0.170	9.51E-08	9.64E-06	5.03E-05	7.36E-04	0.163
PM - GS	kg PM2.5-eq.	0.00416	0.00433	8.95E-07	2.44E-06	7.17E-05	5.21E-06	-4.98E-04

33. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

34. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

35. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.95mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 7.61 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	22.1	22.8	0.00476	0.0361	0.335	0.0369	-8.79
GWP-fossil	kg CO <sub>2</sub> -eq.	22.1	23.0	0.00475	0.0361	0.335	0.0368	-8.80
GWP-biogenic	kg CO <sub>2</sub> -eq.	-3.71E-05	-0.197	4.71E-07	1.20E-05	3.74E-04	7.26E-05	0.00509
GWP-luluc	kg CO <sub>2</sub> -eq.	6.39E-04	0.00156	3.45E-08	3.88E-07	1.29E-05	2.21E-05	-1.81E-04
ODP	kg CFC-11-eq.	9.94E-12	1.15E-11	3.78E-16	3.62E-15	1.49E-12	4.84E-14	1.34E-13
AP	mol H <sup>+</sup> -eq.	0.0751	0.0786	2.26E-05	9.31E-05	0.00168	1.16E-04	-0.00881
EP-freshwater	kg P-eq.	4.35E-06	6.75E-06	8.35E-10	5.93E-09	1.83E-07	2.82E-08	-1.57E-06
EP-marine	kg N-eq.	0.0163	0.0172	1.09E-05	4.21E-05	3.61E-04	2.83E-05	-6.78E-04
EP-terrestrial	mol N-eq.	0.184	0.194	1.20E-04	4.63E-04	0.00394	3.10E-04	9.32E-05
POCP	kg NMVOC-eq.	0.0552	0.0580	3.06E-05	8.99E-05	0.00100	8.95E-05	-0.00626
ADP-minerals & metals <sup>36</sup>	kg Sb-eq.	4.16E-05	4.24E-05	5.80E-11	6.50E-10	2.81E-08	2.56E-09	-4.44E-07
ADP-fossil <sup>36</sup>	MJ	216	227	0.0631	0.478	3.62	0.522	-79.7
WDP <sup>36</sup>	m <sup>3</sup> world-eq. deprived	1.39	1.52	3.53E-05	2.28E-04	0.131	0.00249	-1.69

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>37</sup>	kg CO <sub>2</sub> -eq.	21.5	22.5	0.00470	0.0357	0.332	0.0357	-8.47
PM	Disease incidence	9.81E-07	1.02E-06	2.56E-10	6.10E-10	1.64E-08	1.24E-09	-9.90E-08
IRP <sup>38</sup>	kBq U-235-eq.	0.172	0.177	1.20E-07	1.22E-05	6.33E-05	9.28E-04	0.207
ETP-fw <sup>36</sup>	CTUe	32.8	35.5	0.0159	0.192	0.691	0.155	-2.61
HTP-c <sup>36</sup>	CTUh	2.20E-09	2.36E-09	2.66E-13	3.24E-12	3.10E-11	1.83E-11	-3.69E-09
HTP-nc <sup>36</sup>	CTUh	4.25E-07	4.40E-07	1.66E-11	1.29E-10	1.03E-09	1.85E-09	-1.21E-07
SQP <sup>36</sup>	dimensionless	7.36	14.4	1.45E-04	0.00135	0.463	0.0405	1.07

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	11.9	14.7	2.06E-04	0.00234	0.779	0.0426	5.39
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	11.9	14.7	2.06E-04	0.00234	0.779	0.0426	5.39
PENRE	MJ	216	227	0.0631	0.479	3.62	0.522	-79.7
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	216	227	0.0631	0.479	3.62	0.522	-79.7
SM	kg	1.45	1.48	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0343	0.0371	5.31E-07	4.56E-06	0.00184	7.35E-05	-0.0382

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	5.66E-09	2.03E-08	6.85E-14	7.77E-13	1.21E-10	7.88E-11	-6.12E-10
NHWD	kg	0.321	0.343	9.01E-07	1.16E-05	0.00113	0.762	1.40
RWD	kg	9.59E-04	9.95E-04	9.25E-10	9.35E-08	4.94E-07	6.29E-06	1.53E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	3.15	3.21	0	0	6.85	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	6.85
Steel collected with mixed construction waste	kg	0.761
Recovery for re-use	kg	0
Recovery for recycling	kg	6.85
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.761
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0661

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 0.95mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	21.4	22.1	0.00469	0.0356	0.330	0.0349	-8.37
ODP	kg CFC11-eq.	1.17E-11	1.36E-11	4.45E-16	4.26E-15	1.75E-12	5.69E-14	1.54E-13
AP	kg SO <sub>2</sub> -eq.	0.0606	0.0634	1.57E-05	6.55E-05	0.00138	9.32E-05	-0.00806
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00588	0.00623	3.66E-06	1.42E-05	1.24E-04	9.94E-06	-2.28E-04
POCP	kg ethene-eq.	0.00956	0.00987	1.55E-06	-1.74E-05	7.38E-05	8.69E-06	-0.00378
ADPE	kg Sb-eq.	4.16E-05	4.24E-05	5.81E-11	6.51E-10	2.81E-08	2.60E-09	-4.29E-07
ADPF	MJ	213	223	0.0631	0.477	3.60	0.504	-81.9

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	3.39E-10	3.70E-10	7.21E-15	9.93E-14	1.20E-11	1.60E-12	1.55E-10
HTnc - GS	CTUh	1.25E-10	6.99E-10	3.45E-15	2.24E-14	3.82E-13	3.73E-14	4.30E-12
LU - GS	kg C deficit-eq.	2.41	2.83	1.20E-05	9.25E-05	0.0376	0.00353	0.449
RDW - GS	m <sup>3</sup> -eq.	0.0163	0.0179	3.42E-07	2.90E-06	0.00122	3.69E-05	-0.0209
IR - GS	kBq U235-eq.	0.172	0.177	1.20E-07	1.21E-05	6.33E-05	9.28E-04	0.207
PM - GS	kg PM2.5-eq.	0.00509	0.00529	1.13E-06	3.07E-06	9.03E-05	6.56E-06	-6.36E-04

36. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

37. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

38. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.00mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 8.01 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	23.1	23.9	0.00500	0.0380	0.353	0.0388	-9.26
GWP-fossil	kg CO <sub>2</sub> -eq.	23.1	24.1	0.00500	0.0379	0.352	0.0387	-9.26
GWP-biogenic	kg CO <sub>2</sub> -eq.	2.75E-04	-0.207	4.95E-07	1.26E-05	3.94E-04	7.63E-05	0.00536
GWP-luluc	kg CO <sub>2</sub> -eq.	6.54E-04	0.00162	3.63E-08	4.08E-07	1.35E-05	2.33E-05	-1.91E-04
ODP	kg CFC-11-eq.	1.03E-11	1.19E-11	3.97E-16	3.81E-15	1.57E-12	5.09E-14	1.40E-13
AP	mol H <sup>+</sup> -eq.	0.0785	0.0821	2.38E-05	9.79E-05	0.00177	1.22E-04	-0.00929
EP-freshwater	kg P-eq.	4.50E-06	7.02E-06	8.78E-10	6.24E-09	1.93E-07	2.97E-08	-1.65E-06
EP-marine	kg N-eq.	0.0171	0.0180	1.15E-05	4.42E-05	3.80E-04	2.97E-05	-7.17E-04
EP-terrestrial	mol N-eq.	0.193	0.203	1.26E-04	4.87E-04	0.00414	3.26E-04	5.91E-05
POCP	kg NMVOC-eq.	0.0578	0.0607	3.22E-05	9.45E-05	0.00105	9.41E-05	-0.00660
ADP-minerals & metals <sup>39</sup>	kg Sb-eq.	4.16E-05	4.25E-05	6.10E-11	6.83E-10	2.95E-08	2.70E-09	-4.67E-07
ADP-fossil <sup>39</sup>	MJ	226	237	0.0664	0.503	3.81	0.548	-83.9
WDP <sup>39</sup>	m <sup>3</sup> world-eq. deprived	1.43	1.57	3.71E-05	2.40E-04	0.138	0.00262	-1.78

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>40</sup>	kg CO <sub>2</sub> -eq.	22.5	23.5	0.00495	0.0376	0.349	0.0375	-8.91
PM	Disease incidence	1.03E-06	1.07E-06	2.69E-10	6.42E-10	1.73E-08	1.31E-09	-1.04E-07
IRP <sup>41</sup>	kBq U-235-eq.	0.174	0.179	1.26E-07	1.28E-05	6.66E-05	9.76E-04	0.218
ETP-fw <sup>39</sup>	CTUe	34.0	36.9	0.0167	0.202	0.727	0.163	-2.75
HTP-c <sup>39</sup>	CTUh	2.28E-09	2.44E-09	2.80E-13	3.41E-12	3.26E-11	1.93E-11	-3.88E-09
HTP-nc <sup>39</sup>	CTUh	4.46E-07	4.62E-07	1.75E-11	1.35E-10	1.09E-09	1.94E-09	-1.27E-07
SQP <sup>39</sup>	dimensionless	7.61	15.0	1.52E-04	0.00142	0.487	0.0426	1.13

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	12.2	15.1	2.17E-04	0.00246	0.819	0.0448	5.67
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	12.2	15.1	2.17E-04	0.00246	0.819	0.0448	5.67
PENRE	MJ	226	237	0.0664	0.503	3.81	0.549	-83.9
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	226	237	0.0664	0.503	3.81	0.549	-83.9
SM	kg	1.53	1.56	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0351	0.0381	5.59E-07	4.79E-06	0.00194	7.73E-05	-0.0402

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	5.83E-09	2.12E-08	7.20E-14	8.17E-13	1.27E-10	8.29E-11	-6.45E-10
NHWD	kg	0.325	0.347	9.48E-07	1.22E-05	0.00119	0.802	1.46
RWD	kg	9.68E-04	0.00101	9.73E-10	9.83E-08	5.19E-07	6.61E-06	1.61E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	3.31	3.38	0	0	7.21	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	7.21
Steel collected with mixed construction waste	kg	0.801
Recovery for re-use	kg	0
Recovery for recycling	kg	7.21
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.801
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0693

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.00mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	22.4	23.2	0.00493	0.0374	0.347	0.0367	-8.81
ODP	kg CFC11-eq.	1.21E-11	1.41E-11	4.67E-16	4.48E-15	1.84E-12	5.99E-14	1.62E-13
AP	kg SO <sub>2</sub> -eq.	0.0633	0.0662	1.65E-05	6.89E-05	0.00145	9.80E-05	-0.00850
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00615	0.00652	3.84E-06	1.50E-05	1.31E-04	1.04E-05	-2.41E-04
POCP	kg ethene-eq.	0.0100	0.0103	1.63E-06	-1.83E-05	7.76E-05	9.14E-06	-0.00397
ADPE	kg Sb-eq.	4.16E-05	4.25E-05	6.11E-11	6.84E-10	2.96E-08	2.74E-09	-4.52E-07
ADPF	MJ	222	233	0.0663	0.502	3.79	0.530	-86.2

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	3.46E-10	3.78E-10	7.58E-15	1.04E-13	1.26E-11	1.69E-12	1.63E-10
HTnc - GS	CTUh	1.29E-10	7.33E-10	3.62E-15	2.35E-14	4.02E-13	3.93E-14	4.53E-12
LU - GS	kg C deficit-eq.	2.53	2.96	1.26E-05	9.73E-05	0.0396	0.00372	0.473
RDW - GS	m <sup>3</sup> -eq.	0.0167	0.0184	3.60E-07	3.05E-06	0.00129	3.88E-05	-0.0219
IR - GS	kBq U235-eq.	0.174	0.179	1.26E-07	1.28E-05	6.66E-05	9.76E-04	0.218
PM - GS	kg PM2.5-eq.	0.00532	0.00553	1.19E-06	3.23E-06	9.50E-05	6.90E-06	-6.70E-04

<sup>39</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

<sup>40</sup> This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

<sup>41</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.15mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 9.18 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	26.2	27.1	0.00574	0.0435	0.405	0.0445	-10.6
GWP-fossil	kg CO <sub>2</sub> -eq.	26.2	27.3	0.00574	0.0435	0.404	0.0444	-10.7
GWP-biogenic	kg CO <sub>2</sub> -eq.	0.00121	-0.236	5.68E-07	1.45E-05	4.51E-04	8.76E-05	0.00615
GWP-luluc	kg CO <sub>2</sub> -eq.	6.98E-04	0.00180	4.16E-08	4.68E-07	1.55E-05	2.67E-05	-2.20E-04
ODP	kg CFC-11-eq.	1.13E-11	1.32E-11	4.55E-16	4.37E-15	1.80E-12	5.83E-14	1.60E-13
AP	mol H <sup>+</sup> -eq.	0.0886	0.0927	2.73E-05	1.12E-04	0.00203	1.40E-04	-0.0107
EP-freshwater	kg P-eq.	4.95E-06	7.84E-06	1.01E-09	7.16E-09	2.21E-07	3.40E-08	-1.90E-06
EP-marine	kg N-eq.	0.0193	0.0204	1.32E-05	5.07E-05	4.35E-04	3.41E-05	-8.34E-04
EP-terrestrial	mol N-eq.	0.218	0.229	1.44E-04	5.58E-04	0.00475	3.74E-04	-4.30E-05
POCP	kg NMVOC-eq.	0.0655	0.0688	3.69E-05	1.08E-04	0.00121	1.08E-04	-0.00761
ADP-minerals & metals <sup>42</sup>	kg Sb-eq.	4.17E-05	4.26E-05	7.00E-11	7.84E-10	3.39E-08	3.09E-09	-5.37E-07
ADP-fossil <sup>42</sup>	MJ	256	268	0.0761	0.577	4.37	0.629	-96.5
WDP <sup>42</sup>	m <sup>3</sup> world-eq. deprived	1.57	1.72	4.26E-05	2.75E-04	0.158	0.00301	-2.04

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>43</sup>	kg CO <sub>2</sub> -eq.	25.6	26.7	0.00567	0.0431	0.401	0.0430	-10.3
PM	Disease incidence	1.16E-06	1.21E-06	3.08E-10	7.36E-10	1.98E-08	1.50E-09	-1.21E-07
IRP <sup>44</sup>	kBq U-235-eq.	0.178	0.184	1.44E-07	1.47E-05	7.64E-05	0.00112	0.250
ETP-fw <sup>42</sup>	CTUe	37.8	41.0	0.0191	0.231	0.834	0.187	-3.18
HTP-c <sup>42</sup>	CTUh	2.52E-09	2.70E-09	3.21E-13	3.91E-12	3.74E-11	2.21E-11	-4.47E-09
HTP-nc <sup>42</sup>	CTUh	5.08E-07	5.27E-07	2.00E-11	1.55E-10	1.24E-09	2.23E-09	-1.46E-07
SQP <sup>42</sup>	dimensionless	8.34	16.8	1.75E-04	0.00163	0.559	0.0489	1.30

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	13.0	16.3	2.49E-04	0.00282	0.940	0.0514	6.52
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	13.0	16.3	2.49E-04	0.00282	0.940	0.0514	6.52
PENRE	MJ	256	268	0.0761	0.577	4.37	0.629	-96.5
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	256	268	0.0761	0.577	4.37	0.629	-96.5
SM	kg	1.76	1.79	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0376	0.0409	6.41E-07	5.50E-06	0.00222	8.86E-05	-0.0463

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	6.35E-09	2.40E-08	8.26E-14	9.37E-13	1.46E-10	9.50E-11	-7.44E-10
NHWD	kg	0.336	0.361	1.09E-06	1.40E-05	0.00136	0.920	1.66
RWD	kg	9.95E-04	0.00104	1.12E-09	1.13E-07	5.96E-07	7.58E-06	1.83E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	3.81	3.88	0	0	8.27	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	8.27
Steel collected with mixed construction waste	kg	0.918
Recovery for re-use	kg	0
Recovery for recycling	kg	8.27
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.918
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0791

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.15mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	25.4	26.3	0.00565	0.0429	0.398	0.0421	-10.1
ODP	kg CFC11-eq.	1.34E-11	1.57E-11	5.36E-16	5.14E-15	2.12E-12	6.87E-14	1.84E-13
AP	kg SO <sub>2</sub> -eq.	0.0714	0.0747	1.89E-05	7.90E-05	0.00166	1.12E-04	-0.00980
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00696	0.00738	4.41E-06	1.72E-05	1.50E-04	1.20E-05	-2.80E-04
POCP	kg ethene-eq.	0.0114	0.0118	1.87E-06	-2.10E-05	8.90E-05	1.05E-05	-0.00457
ADPE	kg Sb-eq.	4.17E-05	4.26E-05	7.00E-11	7.85E-10	3.39E-08	3.14E-09	-5.19E-07
ADPF	MJ	251	264	0.0761	0.576	4.35	0.607	-99.1

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	3.67E-10	4.02E-10	8.70E-15	1.20E-13	1.45E-11	1.93E-12	1.87E-10
HTnc - GS	CTUh	1.42E-10	8.34E-10	4.16E-15	2.70E-14	4.61E-13	4.50E-14	5.20E-12
LU - GS	kg C deficit-eq.	2.86	3.36	1.44E-05	1.12E-04	0.0454	0.00426	0.543
RDW - GS	m <sup>3</sup> -eq.	0.0182	0.0201	4.13E-07	3.50E-06	0.00148	4.46E-05	-0.0252
IR - GS	kBq U235-eq.	0.178	0.184	1.44E-07	1.47E-05	7.64E-05	0.00112	0.250
PM - GS	kg PM2.5-eq.	0.00601	0.00626	1.36E-06	3.70E-06	1.09E-04	7.91E-06	-7.74E-04

42. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

43. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

44. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.20mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 9.58 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	27.2	28.1	0.00598	0.0454	0.422	0.0464	-11.1
GWP-fossil	kg CO <sub>2</sub> -eq.	27.2	28.4	0.00598	0.0454	0.421	0.0463	-11.1
GWP-biogenic	kg CO <sub>2</sub> -eq.	0.00153	-0.246	5.92E-07	1.51E-05	4.71E-04	9.13E-05	0.00641
GWP-luluc	kg CO <sub>2</sub> -eq.	7.13E-04	0.00187	4.34E-08	4.88E-07	1.62E-05	2.78E-05	-2.29E-04
ODP	kg CFC-11-eq.	1.17E-11	1.36E-11	4.75E-16	4.55E-15	1.87E-12	6.08E-14	1.66E-13
AP	mol H <sup>+</sup> -eq.	0.0919	0.0963	2.84E-05	1.17E-04	0.00212	1.46E-04	-0.0112
EP-freshwater	kg P-eq.	5.10E-06	8.11E-06	1.05E-09	7.46E-09	2.30E-07	3.55E-08	-1.99E-06
EP-marine	kg N-eq.	0.0200	0.0212	1.37E-05	5.29E-05	4.54E-04	3.56E-05	-8.74E-04
EP-terrestrial	mol N-eq.	0.226	0.238	1.50E-04	5.82E-04	0.00496	3.90E-04	-7.70E-05
POCP	kg NMVOC-eq.	0.0680	0.0715	3.85E-05	1.13E-04	0.00126	1.13E-04	-0.00795
ADP-minerals & metals <sup>45</sup>	kg Sb-eq.	4.18E-05	4.27E-05	7.30E-11	8.17E-10	3.53E-08	3.22E-09	-5.61E-07
ADP-fossil <sup>45</sup>	MJ	265	279	0.0794	0.602	4.55	0.656	-101
WDP <sup>45</sup>	m <sup>3</sup> world-eq. deprived	1.61	1.77	4.44E-05	2.87E-04	0.165	0.00314	-2.13

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>46</sup>	kg CO <sub>2</sub> -eq.	26.6	27.7	0.00592	0.0450	0.418	0.0449	-10.7
PM	Disease incidence	1.21E-06	1.25E-06	3.22E-10	7.67E-10	2.06E-08	1.56E-09	-1.26E-07
IRP <sup>47</sup>	kBq U-235-eq.	0.180	0.185	1.51E-07	1.53E-05	7.96E-05	0.00117	0.261
ETP-fw <sup>45</sup>	CTUe	39.0	42.4	0.0199	0.241	0.870	0.195	-3.32
HTP-c <sup>45</sup>	CTUh	2.60E-09	2.79E-09	3.35E-13	4.08E-12	3.90E-11	2.31E-11	-4.66E-09
HTP-nc <sup>45</sup>	CTUh	5.29E-07	5.48E-07	2.09E-11	1.62E-10	1.30E-09	2.32E-09	-1.53E-07
SQP <sup>45</sup>	dimensionless	8.59	17.4	1.82E-04	0.00170	0.583	0.0510	1.35

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	13.2	16.7	2.59E-04	0.00294	0.980	0.0536	6.80
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	13.2	16.7	2.59E-04	0.00294	0.980	0.0536	6.80
PENRE	MJ	265	279	0.0794	0.602	4.55	0.656	-101
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	265	279	0.0794	0.602	4.55	0.656	-101
SM	kg	1.83	1.87	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0384	0.0418	6.68E-07	5.73E-06	0.00232	9.24E-05	-0.0483

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	6.53E-09	2.49E-08	8.61E-14	9.77E-13	1.52E-10	9.91E-11	-7.77E-10
NHWD	kg	0.339	0.365	1.13E-06	1.46E-05	0.00142	0.959	1.73
RWD	kg	0.00100	0.00105	1.16E-09	1.18E-07	6.21E-07	7.91E-06	1.91E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	3.97	4.05	0	0	8.62	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	8.62
Steel collected with mixed construction waste	kg	0.958
Recovery for re-use	kg	0
Recovery for recycling	kg	8.62
Recovery for energy recovery	kg	0
Disposal to landfill	kg	0.958
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.0824

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.20mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	26.4	27.3	0.00589	0.0448	0.415	0.0439	-10.6
ODP	kg CFC11-eq.	1.38E-11	1.62E-11	5.59E-16	5.36E-15	2.21E-12	7.16E-14	1.92E-13
AP	kg SO <sub>2</sub> -eq.	0.0741	0.0776	1.98E-05	8.24E-05	0.00173	1.17E-04	-0.0102
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00723	0.00767	4.60E-06	1.79E-05	1.56E-04	1.25E-05	-2.93E-04
POCP	kg ethene-eq.	0.0119	0.0123	1.95E-06	-2.19E-05	9.28E-05	1.09E-05	-0.00477
ADPE	kg Sb-eq.	4.18E-05	4.27E-05	7.30E-11	8.18E-10	3.54E-08	3.28E-09	-5.42E-07
ADPF	MJ	261	274	0.0794	0.600	4.53	0.633	-103

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	3.74E-10	4.11E-10	9.07E-15	1.25E-13	1.51E-11	2.02E-12	1.95E-10
HTnc - GS	CTUh	1.46E-10	8.68E-10	4.34E-15	2.81E-14	4.81E-13	4.69E-14	5.43E-12
LU - GS	kg C deficit-eq.	2.97	3.49	1.50E-05	1.16E-04	0.0473	0.00444	0.567
RDW - GS	m <sup>3</sup> -eq.	0.0187	0.0207	4.30E-07	3.65E-06	0.00154	4.65E-05	-0.0263
IR - GS	kBq U235-eq.	0.180	0.185	1.51E-07	1.53E-05	7.96E-05	0.00117	0.261
PM - GS	kg PM2.5-eq.	0.00624	0.00650	1.42E-06	3.86E-06	1.14E-04	8.25E-06	-8.08E-04

45. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

46. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

47. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.50mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 11.93 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	33.4	34.5	0.00745	0.0566	0.526	0.0578	-13.9
GWP-fossil	kg CO <sub>2</sub> -eq.	33.4	34.8	0.00745	0.0566	0.525	0.0577	-13.9
GWP-biogenic	kg CO <sub>2</sub> -eq.	0.00340	-0.305	7.38E-07	1.89E-05	5.87E-04	1.14E-04	0.00799
GWP-luluc	kg CO <sub>2</sub> -eq.	8.03E-04	0.00224	5.41E-08	6.09E-07	2.01E-05	3.47E-05	-2.88E-04
ODP	kg CFC-11-eq.	1.38E-11	1.61E-11	5.92E-16	5.67E-15	2.34E-12	7.58E-14	2.05E-13
AP	mol H <sup>+</sup> -eq.	0.112	0.118	3.54E-05	1.46E-04	0.00264	1.82E-04	-0.0141
EP-freshwater	kg P-eq.	5.99E-06	9.73E-06	1.31E-09	9.30E-09	2.87E-07	4.42E-08	-2.48E-06
EP-marine	kg N-eq.	0.0245	0.0259	1.71E-05	6.59E-05	5.66E-04	4.43E-05	-0.00111
EP-terrestrial	mol N-eq.	0.277	0.292	1.87E-04	7.25E-04	0.00617	4.86E-04	-2.81E-04
POCP	kg NMVOC-eq.	0.0834	0.0877	4.79E-05	1.41E-04	0.00157	1.40E-04	-0.00998
ADP-minerals & metals <sup>48</sup>	kg Sb-eq.	4.20E-05	4.30E-05	9.10E-11	1.02E-09	4.40E-08	4.02E-09	-7.01E-07
ADP-fossil <sup>48</sup>	MJ	324	340	0.0989	0.750	5.67	0.817	-126
WDP <sup>48</sup>	m <sup>3</sup> world-eq. deprived	1.88	2.08	5.53E-05	3.58E-04	0.205	0.00391	-2.67

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>49</sup>	kg CO <sub>2</sub> -eq.	32.6	34.0	0.00737	0.0560	0.521	0.0559	-13.4
PM	Disease incidence	1.48E-06	1.54E-06	4.01E-10	9.56E-10	2.57E-08	1.94E-09	-1.59E-07
IRP <sup>50</sup>	kBq U-235-eq.	0.189	0.195	1.88E-07	1.90E-05	9.92E-05	0.00145	0.326
ETP-fw <sup>48</sup>	CTUe	46.4	50.6	0.0248	0.301	1.08	0.242	-4.17
HTP-c <sup>48</sup>	CTUh	3.07E-09	3.30E-09	4.17E-13	5.08E-12	4.86E-11	2.87E-11	-5.83E-09
HTP-nc <sup>48</sup>	CTUh	6.54E-07	6.77E-07	2.60E-11	2.01E-10	1.62E-09	2.89E-09	-1.91E-07
SQP <sup>48</sup>	dimensionless	10.1	21.0	2.27E-04	0.00212	0.726	0.0635	1.69

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	14.8	19.0	3.23E-04	0.00366	1.22	0.0667	8.50
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	14.8	19.0	3.23E-04	0.00366	1.22	0.0667	8.50
PENRE	MJ	324	340	0.0989	0.750	5.67	0.818	-126
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	324	340	0.0989	0.750	5.67	0.818	-126
SM	kg	2.29	2.33	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0433	0.0475	8.33E-07	7.14E-06	0.00289	1.15E-04	-0.0603

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	7.57E-09	3.05E-08	1.07E-13	1.22E-12	1.90E-10	1.23E-10	-9.74E-10
NHWD	kg	0.361	0.393	1.41E-06	1.82E-05	0.00177	1.19	2.13
RWD	kg	0.00106	0.00111	1.45E-09	1.46E-07	7.74E-07	9.85E-06	2.36E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	4.96	5.05	0	0	10.7	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	10.74
Steel collected with mixed construction waste	kg	1.193
Recovery for re-use	kg	0
Recovery for recycling	kg	10.74
Recovery for energy recovery	kg	0
Disposal to landfill	kg	1.193
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.102

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.50mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	32.4	33.5	0.00734	0.0558	0.517	0.0547	-13.2
ODP	kg CFC11-eq.	1.63E-11	1.92E-11	6.97E-16	6.68E-15	2.75E-12	8.92E-14	2.36E-13
AP	kg SO <sub>2</sub> -eq.	0.0904	0.0946	2.46E-05	1.03E-04	0.00216	1.46E-04	-0.0128
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00885	0.00939	5.73E-06	2.23E-05	1.95E-04	1.56E-05	-3.72E-04
POCP	kg ethene-eq.	0.0147	0.0152	2.43E-06	-2.73E-05	1.16E-04	1.36E-05	-0.00597
ADPE	kg Sb-eq.	4.20E-05	4.30E-05	9.10E-11	1.02E-09	4.40E-08	4.08E-09	-6.78E-07
ADPF	MJ	319	335	0.0989	0.748	5.65	0.789	-129

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	4.15E-10	4.60E-10	1.13E-14	1.56E-13	1.88E-11	2.51E-12	2.44E-10
HTnc - GS	CTUh	1.70E-10	1.07E-09	5.40E-15	3.50E-14	5.99E-13	5.85E-14	6.78E-12
LU - GS	kg C deficit-eq.	3.63	4.28	1.87E-05	1.45E-04	0.0590	0.00554	0.708
RDW - GS	m <sup>3</sup> -eq.	0.0216	0.0240	5.36E-07	4.54E-06	0.00192	5.79E-05	-0.0329
IR - GS	kBq U235-eq.	0.189	0.195	1.88E-07	1.90E-05	9.92E-05	0.00145	0.326
PM - GS	kg PM2.5-eq.	0.00764	0.00795	1.77E-06	4.81E-06	1.42E-04	1.03E-05	-0.00102

48. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

49. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

50. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

## Environmental Product Declaration

TRUECORE® steel

# Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.60mm base material thickness (BMT)

In accordance to EN 15804:2012+A2:2019

Product mass: 12.72 kg/m<sup>2</sup> flat

**Note:** Results for 'A1-A3 incl. rollforming' are for one square metre (1 m<sup>2</sup>) of flat product. The shape and length of the final formed product (i.e. individual frame components) will affect how many flat square metres are required to produce it.

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	35.4	36.6	0.00794	0.0603	0.560	0.0616	-14.8
GWP-fossil	kg CO <sub>2</sub> -eq.	35.4	37.0	0.00794	0.0603	0.560	0.0615	-14.8
GWP-biogenic	kg CO <sub>2</sub> -eq.	0.00403	-0.325	7.86E-07	2.01E-05	6.25E-04	1.21E-04	0.00851
GWP-luluc	kg CO <sub>2</sub> -eq.	8.33E-04	0.00236	5.76E-08	6.49E-07	2.15E-05	3.69E-05	-3.07E-04
ODP	kg CFC-11-eq.	1.45E-11	1.70E-11	6.31E-16	6.05E-15	2.49E-12	8.08E-14	2.18E-13
AP	mol H <sup>+</sup> -eq.	0.119	0.125	3.77E-05	1.55E-04	0.00281	1.94E-04	-0.0150
EP-freshwater	kg P-eq.	6.28E-06	1.03E-05	1.40E-09	9.91E-09	3.06E-07	4.71E-08	-2.65E-06
EP-marine	kg N-eq.	0.0260	0.0275	1.82E-05	7.03E-05	6.03E-04	4.72E-05	-0.00119
EP-terrestrial	mol N-eq.	0.294	0.310	2.00E-04	7.73E-04	0.00658	5.18E-04	-3.49E-04
POCP	kg NMVOC-eq.	0.0886	0.0931	5.11E-05	1.50E-04	0.00167	1.49E-04	-0.0107
ADP-minerals & metals <sup>51</sup>	kg Sb-eq.	4.21E-05	4.31E-05	9.69E-11	1.09E-09	4.69E-08	4.28E-09	-7.48E-07
ADP-fossil <sup>51</sup>	MJ	344	361	0.105	0.799	6.05	0.871	-134
WDP <sup>51</sup>	m <sup>3</sup> world-eq. deprived	1.97	2.18	5.90E-05	3.81E-04	0.219	0.00417	-2.84

### Additional Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP-GHG <sup>52</sup>	kg CO <sub>2</sub> -eq.	34.6	36.1	0.00786	0.0597	0.555	0.0596	-14.3
PM	Disease incidence	1.57E-06	1.63E-06	4.27E-10	1.02E-09	2.74E-08	2.07E-09	-1.70E-07
IRP <sup>53</sup>	kBq U-235-eq.	0.192	0.198	2.00E-07	2.03E-05	1.06E-04	0.00155	0.348
ETP-fw <sup>51</sup>	CTUe	48.9	53.3	0.0265	0.321	1.15	0.258	-4.46
HTP-c <sup>51</sup>	CTUh	3.23E-09	3.48E-09	4.44E-13	5.41E-12	5.18E-11	3.06E-11	-6.21E-09
HTP-nc <sup>51</sup>	CTUh	6.95E-07	7.21E-07	2.77E-11	2.15E-10	1.72E-09	3.08E-09	-2.04E-07
SQP <sup>51</sup>	dimensionless	10.6	22.2	2.42E-04	0.00225	0.774	0.0677	1.80

### Resource use

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
PERE	MJ	15.3	19.8	3.44E-04	0.00391	1.30	0.0711	9.06
PERM	MJ	0	0	0	0	0	0	0
PERT	MJ	15.3	19.8	3.44E-04	0.00391	1.30	0.0711	9.06
PENRE	MJ	344	361	0.105	0.799	6.05	0.871	-134
PENRM	MJ	0.0423	0.0431	0	0	0	0	0
PENRT	MJ	344	361	0.105	0.799	6.05	0.871	-134
SM	kg	2.44	2.48	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0
FW	m <sup>3</sup>	0.0449	0.0494	8.87E-07	7.61E-06	0.00308	1.23E-04	-0.0644

### Waste Categories and Output Flows

Parameter	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HWD	kg	7.92E-09	3.23E-08	1.14E-13	1.30E-12	2.02E-10	1.32E-10	-1.04E-09
NHWD	kg	0.368	0.402	1.51E-06	1.94E-05	0.00189	1.27	2.27
RWD	kg	0.00108	0.00113	1.54E-09	1.56E-07	8.25E-07	1.05E-05	2.51E-05
CRU	kg	0	0	0	0	0	0	0
MFR	kg	5.29	5.39	0	0	11.4	0	0
MER	kg	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0

### End of Life

Parameter	Unit	Total
Steel collected separately	kg	11.44
Steel collected with mixed construction waste	kg	1.272
Recovery for re-use	kg	0
Recovery for recycling	kg	11.44
Recovery for energy recovery	kg	0
Disposal to landfill	kg	1.272
Assumptions for scenario	-	n/a

### Biogenic Carbon Content

	Unit	A1-A3	A1-A3 incl. rollforming
Biogenic carbon content in product	kg C	0	0
Biogenic carbon content in packaging	kg C	0.00268	0.109

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>

## Additional Results for 1 m<sup>2</sup> of TRUECORE® steel in 1.60mm base metal thickness (BMT)

In accordance to EN 15804:2012+A1:2013

### Environmental Impacts

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eq.	34.4	35.5	0.00782	0.0595	0.552	0.0583	-14.1
ODP	kg CFC11-eq.	1.71E-11	2.02E-11	7.42E-16	7.12E-15	2.93E-12	9.51E-14	2.51E-13
AP	kg SO <sub>2</sub> -eq.	0.0958	0.100	2.62E-05	1.09E-04	0.00230	1.56E-04	-0.0137
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq.	0.00939	0.00997	6.11E-06	2.38E-05	2.07E-04	1.66E-05	-3.98E-04
POCP	kg ethene-eq.	0.0156	0.0161	2.59E-06	-2.91E-05	1.23E-04	1.45E-05	-0.00636
ADPE	kg Sb-eq.	4.21E-05	4.31E-05	9.70E-11	1.09E-09	4.69E-08	4.35E-09	-7.23E-07
ADPF	MJ	339	356	0.105	0.797	6.02	0.841	-138

### Additional Green Star v1.3 Indicators

Indicator	Unit	A1-A3	A1-A3 incl. rollforming	C1	C2	C3	C4	D
HTc - GS	CTUh	4.29E-10	4.77E-10	1.20E-14	1.66E-13	2.00E-11	2.68E-12	2.60E-10
HTnc - GS	CTUh	1.79E-10	1.14E-09	5.76E-15	3.73E-14	6.38E-13	6.23E-14	7.23E-12
LU - GS	kg C deficit-eq.	3.85	4.54	2.00E-05	1.55E-04	0.0629	0.00590	0.755
RDW - GS	m <sup>3</sup> -eq.	0.0225	0.0251	5.71E-07	4.84E-06	0.00204	6.17E-05	-0.0351
IR - GS	kBq U235-eq.	0.192	0.198	2.00E-07	2.03E-05	1.06E-04	0.00155	0.348
PM - GS	kg PM2.5-eq.	0.00810	0.00844	1.88E-06	5.12E-06	1.51E-04	1.10E-05	-0.00108

51. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

52. This indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide emissions and uptake and biogenic carbon stored in the product as defined by the IPCC AR5 report (IPCC 2013). As this indicator uses the same characterisation factors as the GWP indicator required in v3.01 of the General Programme Instructions (GPI) of the International EPD® System, its inclusion creates comparability with EPDs based on other Product Category Rules (PCRs) aligned with v3.01 of the GPI, as well as comparability with other GHG reporting according ISO 14067.

53. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

# Interpretation of Results

## Impact Category Results

The majority of production (A1-A3) impacts arise from the combustion of fossil fuels, either directly or in the upstream production of electricity and materials. The upstream production of Hot Rolled Coil steel substrate was the most significant contributor to most environmental impact indicators, and the base metal thickness (BMT) has significant influence on the results due to the dominance of the manufacturing of the steel substrate. This emphasises the importance of selecting the appropriate BMT for the intended application; where a thicker steel sheet does not contribute to structural integrity, a lighter-weight version of TRUECORE® steel with a lower BMT should be considered.

The upstream production of metal coating alloys – a combination of aluminium, zinc and magnesium applied to the steel substrate for corrosion protection – was the most significant contributor to ADP-minerals & metals, IRP, and SQP, and also contributed significantly to most indicators.

Rollforming generally adds less than 5% to total impacts, but has significant impact for EP-freshwater, ODP, WDP, and SQP. These impacts were driven by the upstream production of electricity and cardboard used by rollformers.

## Assumption of average product – Sensitivity of results

When similar products are manufactured on different production lines, there is sometimes variation in results. Should production scheduling change significantly, this may be reflected in changes in the calculated impacts. The reason for these differences is the different mix of production routes that contribute to each product. Where products are preferentially made at different locations, the differences are most evident. While unlikely, should production scheduling change significantly, this may be reflected in changes in the calculated impacts. The variation in impact across production lines for TRUECORE® steel (flat product) is well under 10%.

## References

**AS/NZS 1365:1996 (R2016)**, Tolerances for flat-rolled steel products

**AS 1397:2021**, Continuous hot-dip metallic coated steel sheet and strip - Coatings of zinc and zinc alloyed with aluminium and magnesium

**EN 15804:2012+A1:2013**, Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products

**EN 15804:2012+A2:2019**, Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products

**General Programme Instructions for the International EPD® System**, Version 3.01.

**Instructions of the EPD Australasia Programme**, Version 3.0.

**ISO 14001:2015**, Environmental management systems– Requirements with guidance for use

**ISO 14021:2016**, Environmental labels and declarations – Self-declared environmental claims (Type II environmental labelling)

**ISO 14025:2006**, Environmental labels and declarations – Type III environmental declarations – Principles and procedures

**National Waste Report 2020**, Pickin J et al., A report prepared for the Department of Agriculture, Water and the Environment by Blue Environment Pty Ltd, 4 November 2020, <https://www.dcceew.gov.au/environment/protection/waste/national-waste-reports/2020>

**PCR 2012:01**, Construction Products and Construction Services, Version 2.32, 2020.07.01

**PCR 2019:14**, Construction Products, Version 1.11, 2021-02-05

**Sphera**, GaBi LCA Database Documentation, 2020, <https://www.gabi-software.com/support/gabi/gabi-database-2022-lci-documentation>

## For further reference

EPD Owner **BlueScope Steel Limited**  
steeldirect@bluescopesteel.com

LCA Author **BlueScope Steel Limited**  
steeldirect@bluescopesteel.com  
**thinkstep-anz.com**  
info@thinkstep-anz.com

Programme Operator **EPD Australasia Limited**  
info@epd-australasia.com

Product Website [steel.com.au](http://steel.com.au)

BlueScope Awards and Certificates (ISO 14001, Worldsteel Climate Action Programme) [bluescope.com/sustainable-steel/awards-and-certificates/](http://bluescope.com/sustainable-steel/awards-and-certificates/)

ResponsibleSteel™ certification for Port Kembla Steelworks [bluescope.com/sustainable-steel/responsiblesteel/](http://bluescope.com/sustainable-steel/responsiblesteel/)

BlueScope Sustainability Reporting [bluescope.com/sustainable-steel/reports/](http://bluescope.com/sustainable-steel/reports/)



For further information,  
contact BlueScope Steel Direct  
1800 800 789  
[steel.com.au](http://steel.com.au)

---

**BlueScope Steel Limited**

Level 11, 120 Collins St, Melbourne VIC 3000, Australia

ABN 16 000 011 058