

Hot rolled strip

AS/NZS 1594 – HA1016

General description

Hot rolled carbon steel with a guaranteed chemical composition and excellent weldability.

Typical uses

Hot water system cylinders
Roll forming applications
Press brake forming applications
General fabrications

Features & benefits

Excellent weldability
Good formability
Excellent for galvanising applications

Warnings

This material should be used in conjunction with the appropriate design and welding standards.

An untrimmed edge (Mill Edge) may contain minor surface discontinuities as a result of the rolling process. It is recommended that customers satisfy themselves that the edge is suitable for the application.

Free from coil break for 3 months after production.


Material should be stored under cover to avoid issues with storage related corrosion.

Australian and International Standards

AS/NZS 1594:2002 (R2016)

AS/NZS 1365:1996 (R2016)

ISO 9001:2015 Quality System Certified

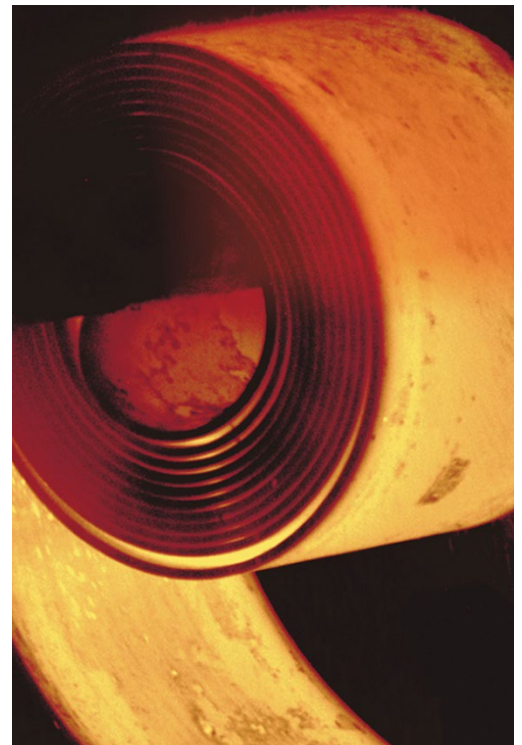

Supply conditions

	Normal	Optional
Thickness Range	1.6 – 12.7 mm *	-
Width Range	750 – 1550 mm *	-
Surface Finish	Hot Rolled	Pickled & Oiled (1.6 to 6mm only)
Edge Condition	Untrimmed (Mill Edge)	Trimmed
Tolerance	AS/NZS 1365:1996 (R2016)	-
Certification	BlueScope	-

* Not all thickness & width combinations are available

Optional supply conditions are subject to dimensional restrictions

Chemical composition

Element	Guaranteed Range or Maximum %
Carbon	0.12 – 0.18
Silicon	0.03
Manganese	0.60 – 0.90
Phosphorus	0.040
Sulfur	0.030
Aluminium	0.10
CEQ (IIW)	0.39

All values shown refer to the relevant Australian Standard unless otherwise stated

$$CEQ(IIW) = C + \frac{Mn}{6} + \frac{(Cr + Mo + V)}{5} + \frac{(Cu + Ni)}{15}$$

Mechanical properties

No guaranteed mechanical properties.

Galvanised Coating Characteristics Related to Steel Composition

Category

A

Refer to Table 9.1 of AS/NZS 2312.2:2014

Where aesthetics are important or where particular coating thickness, surface smoothness or resistance to handling damage criteria exist, specialist advice on steel selection should be sought prior to fabrication of the article or hot dip galvanising.

Weldability Group

WTIA Group

3

Refer to WTIA Technical Note 1 or AS/NZS 1554.1:2014

Fire hazard properties

NCC 2022	Deemed
NCC 2022 Vol 1, Part C2, C2D10, (5)(b)	Non-combustible

steel.com.au

To ensure you have the most current information

1800 024 402

steeldirect@bluescopesteel.com
For more information contact Steel Direct



The information contained in this datasheet is provided by way of general information about this product only, and has not been prepared with your specific needs in mind. We recommend that you seek BlueScope's advice as to the suitability of this product for the purpose(s) for which you propose to use it. To contact BlueScope for advice about your proposed use of this product, please contact Steel Direct. BlueScope and the BlueScope brand mark are registered trade marks of BlueScope Steel Limited. © 2025 BlueScope Steel Limited ABN 16 000 011 058. All rights reserved.