

# XLERPLATE<sup>®</sup> steel

## AS/NZS 3678 – Lasercut 250

### General description

A medium strength structural steel with nominal yield strength of 250MPa designed specifically for laser cutting.

### Typical uses

Components  
Structural fabrication  
Laser profiling

### Features & benefits

Guaranteed minimum strength levels  
Low silicon plate steel designed for laser cutting  
ACRS accreditation (ACRS Certificate No. 120802)  
ATIC Scheme 10 accreditation

### Warnings


This material is produced on a Plate Mill and the surface quality requirements comply with the requirements of the AS/NZS 3678:2016 standard.

This material should be used in conjunction with the appropriate structural design and welding standards.

Lasercut 250 is designed with low Silicon levels. This may have an impact on the thickness of the zinc coating when galvanising. Purchasers should satisfy themselves that the material meets the requirements of their operation.

### Australian and International Standards

AS/NZS 3678:2016  
AS/NZS 1365:1996 (R2016)  
ISO 9001:2015 Quality System certified

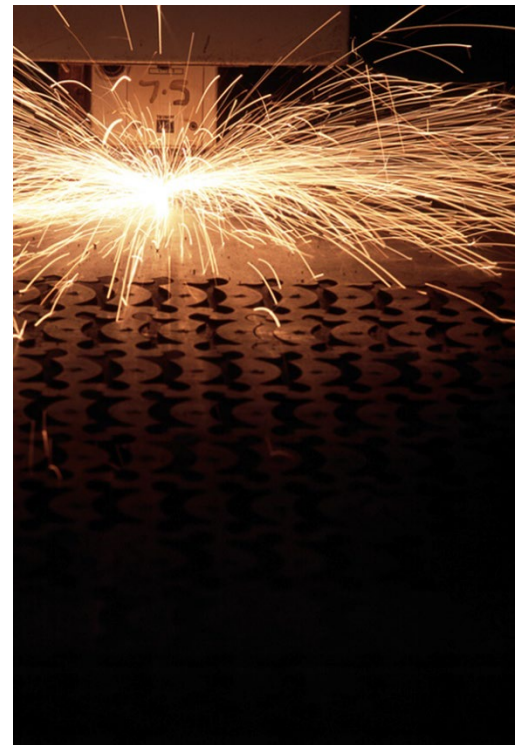

## Normal / optional supply conditions

|                       | Normal  | Optional             |
|-----------------------|---|----------------------|
| Thickness Range       | 8mm – 32mm  | -                    |
| Width Range           | 1500  | -                    |
| Length Range          | 3.0 and 6.0 m   | By Enquiry           |
| Surface Condition     | Hot Rolled in accordance with Section 8 of AS/NZS 3678:2016 | -                    |
| Edge Condition        | Trimmed   | -                    |
| Tolerances            | AS/NZS 1365:1996 (R2016)                                    | -                    |
| Ultrasonic Inspection | -   | AS 1710:2007         |
| Surface Inspection    | BlueScope   | Third party          |
| Certification         | BlueScope   | Third party endorsed |

Optional supply conditions may be subject to dimensional restrictions

## Chemical composition

| Element    | Guaranteed Maximum % |
|------------|----------------------|
| Carbon     | 0.22                 |
| Silicon    | 0.5                  |
| Manganese  | 1.70                 |
| Phosphorus | 0.040                |
| Sulfur     | 0.030                |
| Chromium   | 0.25                 |
| Nickel     | 0.30                 |
| Copper     | 0.40                 |
| Molybdenum | 0.08                 |
| Aluminium  | 0.10                 |
| Niobium**  | 0.020                |
| Titanium   | 0.040                |
| CEQ (IIW)  | 0.44                 |

All values shown refer to the relevant Australian Standard unless otherwise stated

$$CEQ(IIW) = C + \frac{Mn}{6} + \frac{(Cr + Mo + V)}{5} + \frac{(Cu + Ni)}{15}$$

## Mechanical properties

| Tensile Properties (Transverse)    |                | Thickness (mm) |            |             |             |
|------------------------------------|----------------|----------------|------------|-------------|-------------|
|                                    |                | t = 8          | 8 < t ≤ 12 | 12 < t ≤ 20 | 20 < t ≤ 32 |
| Yield Strength (MPa)               | Guaranteed Min | 280            | 260        | 250         | 250         |
| Tensile Strength (MPa)             | Guaranteed Min | 410            | 410        | 410         | 410         |
| Elongation 5.65√S <sub>0</sub> (%) | Guaranteed Min | 22             | 22         | 22          | 22          |

| Formability                   | Thickness (mm)     | Longitudinal | Transverse |
|-------------------------------|--------------------|--------------|------------|
| Recommended min inside Radius | $8 \leq t \leq 10$ | 2.25t        | 1.5t       |
|                               | $10 < t \leq 20$   | 3.0t         | 2.0t       |
|                               | $20 < t \leq 32$   | 6.0t         | 4.0t       |

## Fire hazard properties

| Test & Evaluation Method                                   | Result                                     |
|--|--|
| Combustibility test for materials (AS 1530.1-1994 (R2016)) | Not deemed combustible (steel substrate) # |

# These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use.

**[steel.com.au](http://steel.com.au)**

To ensure you have the most current information

**1800 024 402**

[steeldirect@bluescopesteel.com](mailto:steeldirect@bluescopesteel.com)

For more information contact Steel Direct



The information contained in this datasheet is provided by way of general information about this product only, and has not been prepared with your specific needs in mind. We recommend that you seek BlueScope's advice as to the suitability of this product for the purpose(s) for which you propose to use it. To contact BlueScope for advice about your proposed use of this product, please contact Steel Direct. XLERPLATE®, BlueScope and the BlueScope brand mark are registered trade marks of BlueScope Steel Limited. © 2019 BlueScope Steel Limited ABN 16 000 011 058. All rights reserved.