

XLERPLATE[®] steel

AS/NZS 3678 – Lasercut 350

General description

A high strength structural steel with nominal yield strength of 350MPa designed specifically for laser cutting.

Typical uses

Components
Structural fabrication
Laser profiling

Features & benefits

Guaranteed minimum strength levels
Low silicon plate steel designed for laser cutting
ACRS accreditation (ACRS Certificate No. 120802)
ATIC Scheme 10 accreditation

Warnings

This material is produced on a Plate Mill and the surface quality requirements comply with the requirements of the AS/NZS 3678:2016 standard.


This material should be used in conjunction with the appropriate structural design and welding standards.

Lasercut 350 is designed with low silicon levels. This may have an impact on the thickness of the zinc coating when galvanising. Purchasers should satisfy themselves that the material meets the requirements of their operation.

Material should be stored under cover to avoid issues with storage-related corrosion.

Australian and International Standards

AS/NZS 3678:2016
AS/NZS 1365:1996 (R2016)
ISO 9001:2015 Quality System certified

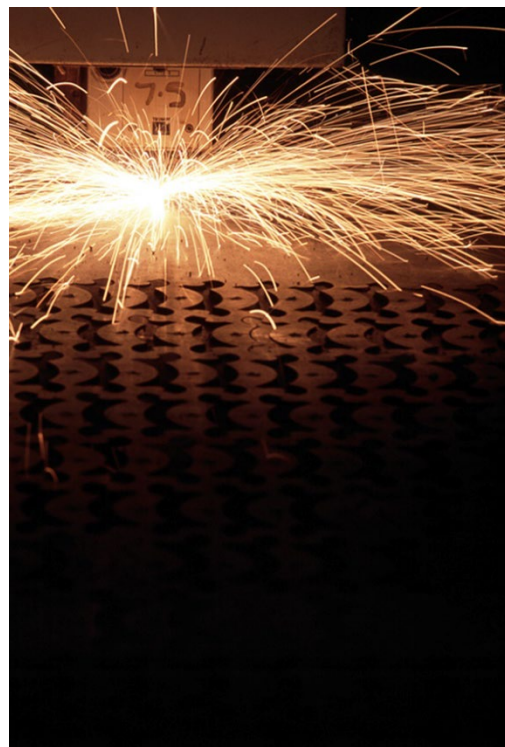

Normal / optional supply conditions

	Normal	Optional
Thickness Range	16mm – 25mm	-
Width Range	1500	-
Length Range	3.0m	By Enquiry
Surface Condition	Hot Rolled in accordance with Section 8 of AS/NZS 3678:2016	-
Edge Condition	Trimmed	-
Tolerances	AS/NZS 1365:1996 (R2016)	-
Ultrasonic Inspection	-	AS 1710:2007 (R2017)
Surface Inspection	BlueScope	Third party
Certification	BlueScope	Third party endorsed

Optional supply conditions may be subject to dimensional restrictions

Chemical composition

Element	Guaranteed Maximum %
Carbon	0.22
Silicon	0.5
Manganese	1.70
Phosphorus	0.040
Sulfur	0.030
Chromium	0.25
Nickel	0.30
Copper	0.40
Molybdenum	0.08
Aluminium	0.10
Niobium**	0.060
Titanium	0.040
CEQ (IIW)	0.48

All values shown refer to the relevant Australian Standard unless otherwise stated

$$CEQ(IIW) = C + \frac{Mn}{6} + \frac{(Cr + Mo + V)}{5} + \frac{(Cu + Ni)}{15}$$

** Niobium + Vanadium + Titanium ≤ 0.15%

Mechanical properties

Tensile Properties (Transverse)		Thickness (mm)	
		16 < t ≤ 20	20 < t ≤ 25
Yield Strength (MPa)	Guaranteed Min	350	340
Tensile Strength (MPa)	Guaranteed Min	450	450
Elongation $5.65\sqrt{S_0}$ (%)	Guaranteed Min	20	20

Formability	Thickness (mm)	Longitudinal	Transverse
Recommended min inside Radius	16 < t ≤ 20	3.75t	2.5t
	t > 20	Hot forming	

Fire hazard properties

Test & Evaluation Method	Result
Combustibility test for materials (AS 1530.1-1994 (R2016))	Not deemed combustible (steel substrate) #

These test results relate only to the behaviour of the test specimens of the material under the particular conditions of the test and they are not intended to be the sole criterion for assessing the potential fire hazard of the material in use.

steel.com.au

To ensure you have the most current information

1800 024 402

steeldirect@bluescopesteel.com
For more information contact Steel Direct



The information contained in this datasheet is provided by way of general information about this product only, and has not been prepared with your specific needs in mind. We recommend that you seek BlueScope's advice as to the suitability of this product for the purpose(s) for which you propose to use it. To contact BlueScope for advice about your proposed use of this product, please contact Steel Direct. XLERPLATE®, BlueScope and the BlueScope brand mark are registered trade marks of BlueScope Steel Limited. © 2023 BlueScope Steel Limited ABN 16 000 011 058. All rights reserved.