


# Steeline SNAPLOK 45

**CLASSIC EURO PANEL RANGE**  
**ROOF OR WALL**  
**CLADDING**

SNAPLOK 45mm high ribs and clip relief grooves give the profile the added rigidity to allow fixing to battens without the expense of substrate backing.

The joining panel snaps over the clip and the under rib with no mechanical seam locking required. The clip system allows the use of long lengths allowing for thermal expansion.

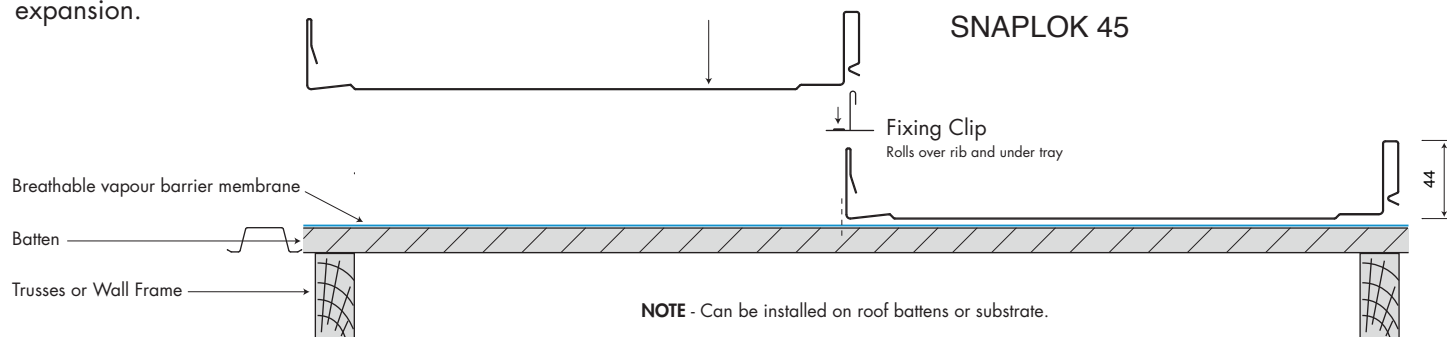

## Preparation

The battens must be rigid and in one plane.

End Span - 600mm

Internal Span - 900mm

A breathable barrier membrane is required under SNAPLOK 45.

## Material Availability

- .6 Colorbond®
- .6 Colorbond® Ultra

## Standard SnapLok Specifications

Rib Height 45mm	
300 Cover .6BMT Standard	
Rib Height and Cover	
SnapLok 45 Length	- 1.0m - 15.0m
Minimum Pitch	- 1 Degree
Custom Widths	- .55 Material only
Notching	- 20mm Rib Cut Back
Stop Ends	- Notch
Screws	- Timber - Wafer 10-12 x 25 - Steel - Wafer 10 - 24 x 22



**Colorbond®**



**Ph. 1300 STEELINE**

**steeline.com.au**

**Service over and above**