


Steeline SNAPLOK 45

**CLASSIC EURO PANEL RANGE
ROOF OR WALL
CLADDING**

SNAPLOK 45mm high ribs and clip relief grooves give the profile the added rigidity to allow fixing to battens without the expense of substrate backing.

The joining panel snaps over the clip and the under rib with no mechanical seam locking required. The clip system allows the use of long lengths allowing for thermal expansion.

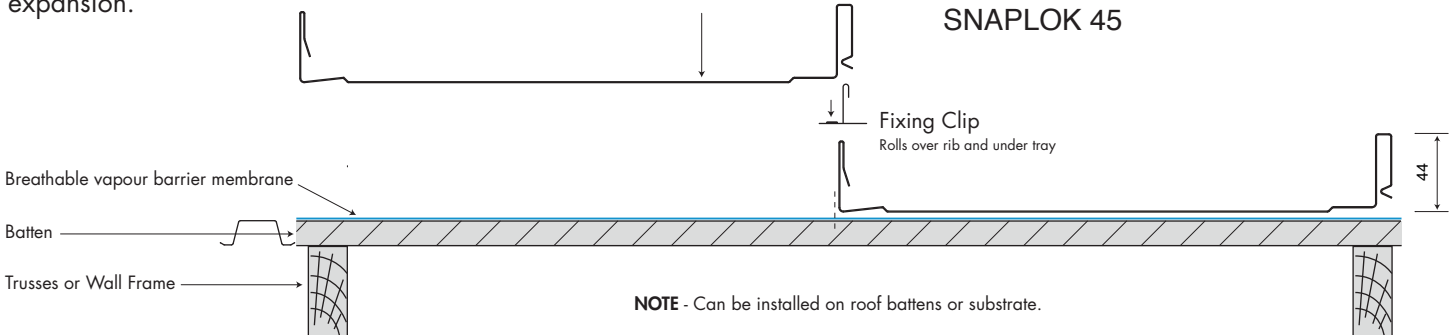

Preparation

The battens must be rigid and in one plane.

End Span - 600mm

Internal Span - 900mm

A breathable barrier membrane is required under Snap Seam 45.

Material Availability

- .6 Colorbond®
- .6 Colorbond® Ultra

Standard SnapLok Specifications

	Rib Height 45mm	
Rib Height and Cover	300 Cover	.6BMT Standard
SnapLok 45 Length	- 1.0m - 15.0m	
Minimum Pitch	- 1 Degree	
Custom Widths	- .55 Material only	
Notching	- 20mm Rib Cut Back	
Stop Ends	- Notch	
Screws	- Timber - Wafer 10-12 x 25 - Steel - Wafer 10 - 24 x 22	



Colorbond®

Ph. 1300 STEELINE

steeline.com.au

Steeline

Service over and above