



**STRAMIT
MONOCLAD®**
ROOF AND WALL CLADDING


p r o d u c t t e c h n i c a l m a n u a l



STRAMIT MONOCLAD®

ROOF AND WALL CLADDING

Selection & Specification

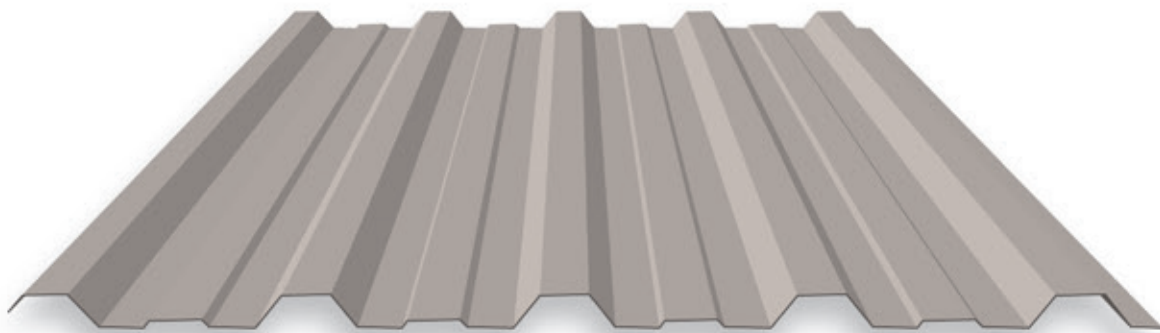

Features

- Economical – unique blend of characteristics provides a low installed cost.
- Simple Installation – through fixing and easy notching of flashings.
- 762mm Cover – quick installation and easy handling.
- Hi-tensile Steel – lightweight and high strength.
- Deep Ribs – provide excellent spanning capability with good water carrying capacity.
- Domed Crest – provides greater foot traffic performance.
- Anti-capillary Side Laps – gives improved weather structure.
- 2° Minimum Pitch – reduces support structure.
- Fully Tested – a full range of load performance tables to suit almost any application.

Applications

The visual appeal, strength, wide cover, light weight and weather resistance of **Stramit Monoclad®** cladding make it perfect for all commercial roofing and walling applications. Its excellent strength and ease of assembly allow for long, economical spans. The large water-carrying capacity and weather-tightness permit very low roof pitches, leading to economies in the building structure.

Stramit Monoclad® cladding may also be used for domestic applications.

Stramit Monoclad® cladding is only intended for use in commercial/industrial/residential roof or wall cladding applications. Do not use for any other purpose.

IMPORTANT NOTE

The information contained within this brochure is for general use and information only. Before application in a particular situation, Stramit recommends that you obtain appropriate independent qualified expert advice confirming the suitability of product(s) and information in question for the application proposed. While Stramit accepts its legal obligations, be aware however that to the extent permitted by law, Stramit disclaims all liability (including liability for negligence) for all loss and damage resulting from the use of the information provided in this brochure.

Materials

Stramit Monoclad[®] cladding is manufactured from hi-tensile G550 colour coated steel, aluminium-zinc-magnesium or zinc-aluminium alloy coated steel. In some locations galvanised and severe environment colour coated steel may be available by arrangement. Colour coated steels are in accordance with AS2728 – Category 3 and, for the substrate, with ASI397. Aluminium-zinc-magnesium alloy coated AM100/AM125, zinc-aluminium alloy coated AZI50 and galvanised Z450 conform to ASI397.

Stramit has a comprehensive range of colours as standard. Ask your nearest Stramit location for colour availability.

STRAMIT MONOCLAD[®] CLADDING – SHEETING MASS (kg/m² of roof area)

| | ZINCALUME [®] | COLORBOND [®] | GALVANISED |
|------------|------------------------|------------------------|------------|
| 0.42mm BMT | 4.28 | 4.35 | 4.65 |
| 0.48mm BMT | 4.86 | 4.93 | 5.23 |

Adverse Conditions

Stramit Monoclad[®] roof and wall cladding will give excellent durability in almost all locations. It is however important to choose the correct coating for each application environment as shown in the table below. Durability recommendations do vary based on the application of the product, in roofing or walling installations. Please read the tables below carefully.

| suitability of coating type | roof sheeting - site exposure condition | | | | wall cladding - distance from marine environment |
|----------------------------------|---|--------|---------------|--------------------|--|
| | benign/moderate | marine | severe marine | very severe marine | |
| Zinc-Aluminium (AZI50) | ✓ | ✗ | ✗ | ✗ | >1km |
| ZINCALUME [®] (AM125) | ✓ | ✓ | ✗ | ✗ | >1km |
| COLORBOND [®] | ✓ | ✓ | ✗ | ✗ | >1km |
| COLORBOND [®] METALLIC | ✓ | ✗ | ✗ | ✗ | >1km |
| COLORBOND [®] ULTRA | N/A | N/A | ✓ | ✗ | 501m-1000m |
| COLORBOND [®] STAINLESS | N/A | N/A | N/A | ✓ | 0m-500m |

The approximate site exposure conditions in the table above are defined below.

| site exposure condition | roof sheeting - distance of site from | |
|-------------------------|---------------------------------------|-------------|
| | breaking surf/exposed marine | calm marine |
| benign | >1km | >1km |
| moderate | 401m-1000m | 201-1000m |
| marine | 201m-400m | 101m-200m |
| severe marine | 101m-200m | 0m-100m |
| very severe marine | 0m-100m | N/A |

The suitability and exposure tables above are current at the time of publication and are guidelines only; conditions will vary from site to site. Please check the Bluescope Technical Bulletins at www.bluescopesteel.com.au for the latest information and guidance on selection, maintenance and durability. If uncertain about the appropriate coating for a particular application, or if the product is to be used in environments affected by industrial emissions, fossil fuel combustion, animal farming, or has unwashed areas, please contact your nearest Stramit office for advice.

Compatibility

All building products need to be checked for compatibility with adjacent materials. These checks need to be for both direct contact between materials, and where water runs from one material to another. The following guidelines generally avoid material incompatibility:

- For zinc aluminium alloy coated steel, colour coated steel and galvanised steel roofs avoid copper, lead, green or treated timber, stainless steel, uncoated steel and mortar or concrete.
- In addition galvanised steel roofs should not receive drainage from aluminium or any inert materials, such as plastics, glass, glazed tiles, colour coated steel and zinc aluminium alloy coated steel. Contact Stramit for more detailed information.

Testing

Stramit has in-house, purpose built, testing equipment used to design, develop and improve products for the Australian market. In addition many Stramit products are tested or witnessed by independent organisations. These include:

- Cyclone Testing Station (James Cook University)
- The University of Sydney
- University of Technology, Sydney

This ongoing research and development activity ensures that Stramit remains at the forefront of innovation, design and consumer information.

Architectural Specification


This specification can be found on the Stramit web site and can be easily downloaded onto your documentation.

The roofing/walling shall be 0.42 (or 0.48) mm BMT **Stramit Monoclad**[®] cladding in continuous lengths with trapezoidal ribs approximately 29mm high, spaced at 190mm centres. Sheeting material shall be protected steel sheet to Australian Standard ASI397, with a minimum yield stress of 550MPa (Grade G550) and an AM100/AZI50 coating with an oven-baked paint film of selected colour, or a plain AM125/AZI50 coating. The sheeting shall be fixed to the purlins/girts in accordance with the manufacturer's recommendations. Suitable fixing screws in accordance with Australian Standards AS3566, Class 3, shall be used at every rib at every support with side lap fasteners installed at mid span if required. Sheets shall be laid in such a manner that the approved side lap faces away from the prevailing weather. A minimum of 50mm shall be provided for projection into gutters. Flashings shall be supplied in compatible materials as specified; minimum cover of flashing shall be 150mm. All sheeting shall be fixed in a workman-like manner, leaving the job clean and weathertight. Repair minor blemishes with touch-up paint supplied by the roof manufacturer. All debris (nuts, screws, cuttings, filings etc.) shall be cleaned off daily.

Design

Spans

The spans shown below take account of 'normal' foot traffic and wind resistance including local pressure zone effects. Pressures are based on AS4055 or ASI 170.2. Where the two standards differ, the worst case has been taken for each classification. Data should only be used for buildings 7m or less in height, 1000m² or less in area, where both length and width exceed the building height and site is unaffected by land topography.

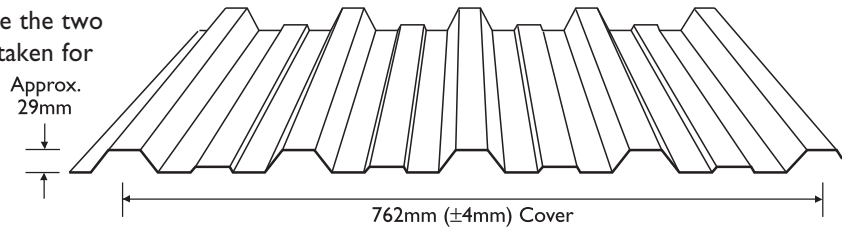

STRAMIT MONOCLAD® CLADDING – MAXIMUM SPAN CHART (mm)

| bmt (mm) | roofs - all areas unless noted* | | | | | walls | | | | | overhangs | |
|---|---------------------------------|-------------|--------------|-------------|---------------------------------|---------------------------------|------|--------------|-------------|---------------------------------|-----------|----------------|
| | pressure (kPa) service -ability | | double spans | equal spans | internal (end) span combination | pressure (kPa) service -ability | | double spans | equal spans | internal (end) span combination | free edge | stiffened edge |
| N1 or Region A (TC3, FS) WIND CLASSIFICATION | | | | | | | | | | | | |
| 0.42 | 1.07 | 1.81 | 1350 | 1350 | 1700 (1400) | 0.55 | 0.94 | 2900 | 3000 | 3000 (2500) | 150 | 400 |
| 0.48 | 1.07 | 1.81 | 1700 | 1700 | 2300 (1900) | 0.55 | 0.94 | 3000 | 2800 | 3000 (2500) | 200 | 500 |
| N2 or Region B (TC3, FS) or Region A (TC2.5, PS) WIND CLASSIFICATION | | | | | | | | | | | | |
| 0.42 | 1.53 | 2.53 | 1350 | 1350 | 1700 (1400) | 0.79 | 1.31 | 2250 | 2400 | 3000 (2500) | 150 | 400 |
| 0.48 | 1.53 | 2.53 | 1700 | 1700 | 2300 (1900) | 0.79 | 1.31 | 2700 | 2600 | 3000 (2500) | 200 | 500 |
| N3 or Region B (TC2.5, PS) or Region A (TC2, NS) WIND CLASSIFICATION | | | | | | | | | | | | |
| 0.42 | 1.92 | 3.92 | 1350 | 1350 | 1700 (1400) | 0.99 | 2.03 | 1950 | 2100 | 2700 (2250) | 100 | 300 |
| 0.48 | 1.32 | 2.70 | 1700 | 1700 | 2300 (1900)* | 0.99 | 2.03 | 2550 | 2400 | 3000 (2500) | 150 | 400 |
| | <i>1.92</i> | <i>3.92</i> | <i>1700</i> | <i>1700</i> | <i>2050 (1700)</i> | | | | | | | |

* Where roof pitch is less than 10 degrees, use spans given in red italics for roof corners.

Internal spans must have both end spans 20% shorter. TC - Terrain category. FS, PS, NS - Full, partial and no shielding.

Values are only valid for use with steel members of 1.5mm or thicker. Where thinner supports are used, fastener capacity must be checked. Refer to **Stramit® Top Hat & Battens Product Technical Manual** for more information.

For more specific applications **Stramit Monoclad** cladding must be designed to the pressure and foot traffic limitations below.

Pressures

STRAMIT MONOCLAD® CLADDING – SERVICEABILITY LIMIT STATE CAPACITY

| thickness bmt(mm) | fasteners per sheet at each support | span type | pressure (kPa) at the spans (mm) shown | | | | | | | | | |
|-------------------|-------------------------------------|-----------|--|------|------|------|------|------|------|------|------|--|
| | | | 600 | 900 | 1200 | 1500 | 1800 | 2100 | 2400 | 2700 | 3000 | |
| 0.42 | 4 | internal | 5.41 | 5.41 | 3.75 | 2.76 | 2.10 | 1.64 | 1.29 | 1.01 | 0.80 | |
| | | equal | 5.00 | 5.00 | 2.87 | 1.88 | 1.34 | 1.02 | 0.81 | 0.67 | 0.56 | |
| | | double | 4.06 | 4.06 | 2.34 | 1.55 | 1.13 | 0.88 | 0.72 | 0.61 | 0.53 | |
| 0.48 | 4 | internal | 7.28 | 7.28 | 4.44 | 3.11 | 2.37 | 1.91 | 1.61 | 1.40 | 1.25 | |
| | | equal | 5.07 | 5.07 | 3.76 | 2.78 | 2.05 | 1.49 | 1.04 | 0.68 | 0.39 | |
| | | double | 4.54 | 4.54 | 3.52 | 2.70 | 2.05 | 1.55 | 1.15 | 0.83 | 0.56 | |

STRAMIT MONOCLAD® CLADDING – STRENGTH LIMIT STATE CAPACITY (Non-cyclonic)

| thickness bmt(mm) | fasteners per sheet | span type | pressure (kPa) at the spans (mm) shown | | | | | | | | | |
|-------------------|---------------------|-----------|--|------|------|------|------|------|------|------|------|--|
| | | | 600 | 900 | 1200 | 1500 | 1800 | 2100 | 2400 | 2700 | 3000 | |
| 0.42 | 4 | internal | 8.69 | 8.69 | 7.01 | 5.75 | 4.81 | 4.09 | 3.52 | 3.07 | 2.69 | |
| | | equal | 7.13 | 7.13 | 6.59 | 5.63 | 4.72 | 3.93 | 3.27 | 2.72 | 2.25 | |
| | | double | 6.24 | 6.24 | 4.81 | 4.00 | 3.49 | 3.14 | 2.88 | 2.69 | 2.53 | |
| 0.48 | 4 | internal | 9.42 | 9.42 | 8.33 | 6.99 | 5.81 | 4.83 | 4.02 | 3.34 | 2.77 | |
| | | equal | 8.17 | 8.17 | 7.52 | 6.32 | 5.18 | 4.21 | 3.38 | 2.69 | 2.10 | |
| | | double | 8.10 | 8.10 | 7.46 | 6.38 | 5.37 | 4.50 | 3.77 | 3.16 | 2.64 | |

Tables are based on testing to ASI 562 and AS4040 parts 0, 1 and 2. Internal spans must have both end spans 20% shorter.

Values only valid for use with steel support members of 1.5mm or thicker. Where thinner supports are used, fastener capacity must be checked. Refer to **Stramit® Top Hat & Battens Product Technical Manual** for more information.

Refer to **Stramit® Cyclonic Areas Roof and Wall Cladding** brochure for information on use in cyclonic regions.

Foot Traffic

Foot traffic limits for **Stramit Monoclad**[®] cladding are shown for three alternate foot traffic categories. These are:

- High Maintenance – for applications with repeated maintenance, particularly where personnel may be unfamiliar with correct procedures for walking on metal roofs.
- Normal – based on traditional expectations, with moderate maintenance foot traffic using designated foot paths.
- Controlled – spans that conform to ASI562 but require minimal careful foot traffic only on the designated foot path. Suggested for use only where occasional aesthetic imperfections from foot traffic are acceptable.

STRAMIT MONOCLAD[®] CLADDING – FOOT TRAFFIC LIMITED SPANS (mm)

| thickness bmt | fasteners per sheet | span type | foot traffic limits | | |
|------------------|------------------------|--------------|---------------------|--------|------------|
| | | | heavy | normal | controlled |
| 0.42 | 4 | internal | - | 1700 | 2100 |
| | | equal | - | 1350 | 1800 |
| | | double | - | 1350 | 1800 |
| 0.48 | 4 | internal | 1000 | 2300 | 2700 |
| | | equal | 800 | 1700 | 2250 |
| | | double | 800 | 1700 | 2250 |

Tables are based on tests to ASI562 and AS4040 parts 0 and 1.

For more information on foot traffic performance of **Stramit Monoclad**[®] cladding and other Stramit roofing profiles refer to Stramit's Foot Traffic Guide.

Spring Curving

Stramit Monoclad[®] cladding can be spring-curved, concave and convex, including curved ridges, provided it is sealed at the apex and within the recommended limits below:

STRAMIT MONOCLAD[®] CLADDING – SPRING-CURVED RADII LIMITS (m)

| bmt (mm) | performance restricted | | restricted by drainage at the rainfall intensities shown | | |
|-------------|------------------------|--------------------------|--|--------------|--------------|
| | minimum* radius | lowest neutral radius | 370 mm/hr | 220 mm/hr | 150 mm/hr |
| 0.42 | 70* | 132 | 105 | 177 | 259 |
| 0.48 | 60* | 132 | 105 | 177 | 259 |

*At these radii a maximum support spacing of 1200mm applies, and limit state pressure capacities are reduced by 14% for serviceability and 7% for strength. These reductions apply proportionately up to the lowest neutral radius.

For more comprehensive information on spring curving **Stramit Monoclad**[®] cladding and other **Stramit**[®] roofing profiles refer to the Stramit Spring Curving Guide.

Thermal Expansion

All metal roof sheeting is subject to thermal expansion and, where there is a temperature difference between the sheeting and the structure, this needs to be accommodated. The colour of the sheeting will affect the amount of thermal expansion, and whether the sheet is flat or curved will affect its ability to resist without problems.

Sheet lengths should be limited to those shown below.

STRAMIT MONOCLAD[®] CLADDING – MAXIMUM SHEET LENGTH (m)

| roof colour | light | dark |
|---------------|-------|------|
| Flat | 25 | 17 |
| Spring-curved | 20 | 17 |

Water Carrying

Stramit Monoclad[®] cladding has excellent water-carrying capacity enabling roof slopes to be as low as 2° for many applications. Roof run lengths are the combined lengths of all roof elements contributing to a single pan drainage path. This can include the roof length upstream of a roof penetration that concentrates flow into other pans. The table below gives slopes for 100 year return period rainfall intensity.

STRAMIT MONOCLAD[®] CLADDING – MINIMUM ROOF SLOPE (degrees)

| rainfall intensity mm/hr | total roof run length (m) | | | | | | | | | | | max roof run length (m) at min slope | |
|--------------------------------|---------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|----|
| | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | | |
| 150 | | | | | | | | 2.0 | 2.3 | 2.9 | 3.6 | 105 | |
| 175 | <i>Minimum</i> | | | | | | 2.0 | 2.0 | 2.7 | 3.5 | 4.3 | 5.2 | 90 |
| 200 | <i>Slope 2°</i> | | | | | | 2.1 | 2.9 | 3.8 | 4.8 | 5.9 | 7.1 | 78 |
| 225 | | | | 2.0 | 2.9 | 3.9 | 5.1 | 6.3 | 7.7 | 9.2 | 70 | | |
| 250 | | | 2.0 | 2.7 | 3.8 | 5.1 | 6.5 | 8.0 | 9.7 | 12 | 63 | | |
| 275 | | | 2.3 | 3.5 | 4.8 | 6.3 | 8.0 | 9.9 | 12 | 15 | 57 | | |
| 300 | | 2.0 | 2.9 | 4.3 | 5.9 | 7.7 | 9.7 | 12 | 15 | 17 | 52 | | |
| 325 | | 2.2 | 3.6 | 5.2 | 7.1 | 9.2 | 12 | 15 | 17 | 20 | 48 | | |
| 350 | | 2.7 | 4.3 | 6.2 | 8.3 | 11 | 14 | 17 | 20 | 24 | 45 | | |
| 375 | 2.0 | 3.2 | 5.1 | 7.2 | 9.7 | 13 | 16 | 19 | 23 | | 42 | | |
| 400 | 2.0 | 2.1 | 3.8 | 5.9 | 8.3 | 12 | 15 | 18 | 22 | | 39 | | |

Exceeds the scope of this manual.

Note: Depth of flow in pan = 60% height of underlap (agreed industry standard)

For more information on water carrying performance of **Stramit Monoclad**[®] cladding and other Stramit roofing profiles refer to Stramit's Roof Slope Guide.

Darwin Area


Information on the use of **Stramit Monoclad**[®] cladding in the Darwin area can be found in deemed-to-comply sheets M/148/01, M/103/03 and M/104/04 in the Darwin Area Manual. These are available from Stramit.

Procurement


Prices

Prices on **Stramit Monoclad**[®] cladding and its accessories can be obtained from your nearest Stramit location or distributor of Stramit products. As Stramit does not provide an installation service, ask your tradesperson for a supply and fix price. Contact your nearest Stramit location for the names of tradespersons in your area.

Related Products



Ridge Capping – standard or custom dimensions




Flashings – a range of custom flashings




Filler Strips – top and bottom; for eaves, ridge and joint sealing

Use only where sealing is preferred to ventilation



Insulation & roofing mesh – a range of mesh, plain & foil backed blanket



Translucent sheeting – fibreglass sheeting in a range of shades and densities

Length

Stramit Monoclad[®] cladding is supplied cut-to-length. When designing or transporting long products ensure that the length is within the limit of the local Transport Authority regulations. The manufacturing tolerance on the length of product supplied is +0, -15mm.

Ordering

Stramit Monoclad[®] cladding can be ordered directly, through distributors, or supplied and fixed from a roofing contractor.

Delivery/Unloading

Delivery can normally be made within 48 hours, subject to the delivery location, quantity and material availability, or can be at a pre-arranged date and time. Please ensure that suitable arrangements have been made for truck unloading, as this is the responsibility of the receiver. Pack mass may be up to one tonne. When lifting **Stramit Monoclad**[®] cladding, care should be taken to ensure that the load is spread to prevent damage.

Handling/Storage

Stramit Monoclad[®] cladding should be handled with care at all times to preserve the product capabilities and quality of the finish. Packs should always be kept dry and stored above ground level while on site. If the sheets have become wet, they should be separated, wiped and placed in the open to promote drying.

Installation

Fasteners

All fastening screws must conform to AS3566 – Class 3, are to be hexagon headed and for roofing must be used with sealing washers. For connecting to purlins or top hats use:



For steel (0.75bmt or greater)*
– No.12 x 45mm self-drilling and threading screws for crest fixing



– No.10 x 16mm self-drilling and threading screws for pan fixing to walls



For timber (F11 or better)
– No. 12 x 65mm type 17 screws for crest fixing



– No.10 x 25mm type 17 screws for pan fixing to walls



Side Laps
– No. 8 - 15 x 15mm self drilling and threading screws, or



– 3.2mm diameter sealed aluminium pop rivets

* For steel less than 0.75bmt thickness refer to **Stramit**[®] Top Hats & Battens Product Technical Manual.

Site Induction

Consideration should be given to handling and installation issues as part of site induction safety procedures.

Specific consideration should be given to pack handling, avoidance of cuts, trips, slips and falls, long sheet handling particularly in windy conditions, sheet cutting procedures and surface temperature on sunny days. Personal Protection Equipment (PPE) should always be used.

Installation

Stramit Monoclad[®] cladding is readily installed with or without fibreglass insulation blanket. If practical lay sheets in the opposite direction to prevailing weather.

Installation of **Stramit Monoclad**[®] cladding is a straightforward procedure using the following fixing sequence:

- 1) Ensure all purlins are in line and correctly installed and that mesh and blanket (if specified) are in place.
- 2) Position and fix the first sheet ensuring the correct sheet overhangs (minimum 50mm). Ensure that screws are not overtightened.
- 3) Continue to fix subsequent sheets checking that sheet ends at the lower edge are exactly aligned.

It is important that the underlap of one sheet does not protrude beyond the overlap of the next – if this is unavoidable, the underlap must be trimmed locally or water 'drawback' may occur.

- 4) Measure the overall cover width at top and bottom of the sheets from time to time to avoid 'fanning'.
- 5) For roof spans exceeding 900mm and wall spans exceeding 1200mm, stitch the sidelaps at midspan.
- 6) Turn up the pans at the upper roof edge, turn down the pan at the lower edge and install flashings.
- 7) Clean up the roof after each days work, removing all screws, cuttings, swarf etc, and leave roof clean and watertight.

Insulation


Stramit Monoclad[®] cladding is suitable for use with insulating blanket. Glasswool blanket up to 50mm thick can be readily used. Increased thicknesses require longer fasteners and greater care in installation.

Increased thicknesses up to 100mm require fasteners that are 20mm longer. However, care must be taken when fixing the sheet. Stand on pans either side of rib to compress the additional material and fix fasteners until seal is touching. Do not over tighten fasteners.

Walking

As with all roofing products, we recommend extra caution be taken when walking on the roof. When walking on **Stramit Monoclad**[®] cladding roofing always wear flat rubber soled shoes and place feet only in the pans, taking care to avoid the last pan or two near edges of the metal roof area.

Walk only in pans, or on ribs at purlin supports

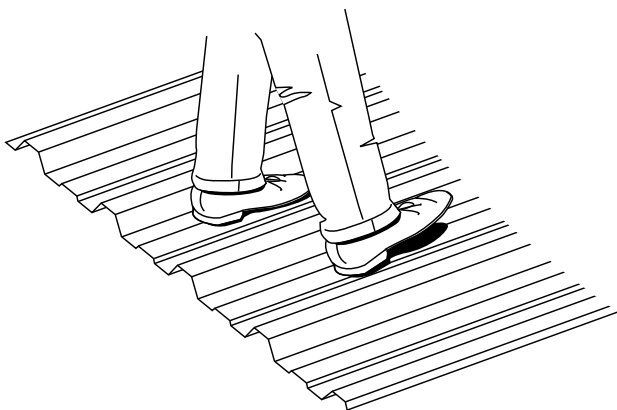

Good Practice

Stramit recommends that good trade practice be followed when using this product, such as that found in Australian Standards Handbook HB39.

Sheet Handling

Cut resistant or leather gloves should be worn when handling product. Foot protection should be worn when handling and transporting product.

Cutting

Stramit Monoclad[®] cladding can be easily cut, where required, using a power saw with a steel cutting blade or a power nibbler and, for localised cutting, tin snips. Avoid the use of abrasive discs as these can cause burred edges and coating damage. Please dispose of any off-cuts carefully.

Additional Information

Maintenance

Exterior surfaces of metal products unwashed by rain can benefit from occasional washing to remove build-up of corrosive salts. Walls beneath eaves or awnings are such a situation.

Further Information

As well as our standard range of Technical Manuals, Installation Leaflets, Case Studies and other promotional literature Stramit has a series of Guides to aid design. These include:

- Roof Slope Guide
- Foot Traffic Guide
- Concealed Fixed Decking
- Bullnosing, Curving and Crimping
- Acoustic Panels
- Cyclonic Areas
- Spring Curving Guide

Please contact your nearest Stramit location or visit www.stramit.com.au to download Stramit literature.

Other Products

Stramit offers a wide range of building products, including:

- Purlins and girts
- Formwork decking
- Roof and wall sheeting
- Lightweight structural sections
- Truss components
- Gutters and downpipes
- Fascias
- Custom flashings
- Insulating products
- Fasteners

References

In preparing this document reference has been made to:

- Standards Australia Handbook – HB39 (Installation code for metal roof and wall cladding)
- BlueScope Steel – Technical Bulletin TB-4 (Maintenance of Colorbond prepainted steel roofing)
- BlueScope Steel – Technical Bulletin TB-1 (Steel roofing and walling products – selection guide)



Building Products

The Stramit web page can be found at:

www.stramit.com.au

Details of many **Stramit**® products can also be seen on the AIA site 'Product Selector' at:

www.selector.com.au

contact numbers for information

| | | prices | availability | general | technical |
|--|----------------------------|---|--------------------------------|---|---|
| | | | products coating colours | other | advice product data |
| SYDNEY 33-83 Quarry Rd, Erskine Park NSW 2759 | phone fax | (02) 9834 0909 (02) 9834 0988 | | (02) 9834 0900 (02) 9834 0988 | |
| CANBERRA 4 Bass Street, Queanbeyan NSW 2620 | phone fax | (02) 6132 8300 (02) 6132 8333 | | | |
| COFFS HARBOUR 6 Mansbridge Drive, Coffs Harbour NSW 2450 | phone fax | (02) 6656 3800 (02) 6656 3808 | | | |
| NEWCASTLE 17 Nelson Road, Cardiff NSW 2285 | phone fax | (02) 4041 3400 (02) 4041 3423 | | | |
| ORANGE 51 Leewood Drive, Orange NSW 2800 | phone fax | (02) 6363 3900 (02) 6363 3911 | | | |
| MELBOURNE 2/1464 Ferntree Gully Road, Knoxfield VIC 3180 | phone fax | (03) 9237 6300 (03) 9237 6399 | | (03) 9237 6200 (03) 9237 6299 | |
| ALBURY 18 Ariel Drive, Albury NSW 2640 | phone fax | (02) 6041 7600 (02) 6041 7666 | | | |
| BENDIGO Ramsay Court, Kangaroo Flat VIC 3555 | phone fax | (03) 5448 6400 (03) 5447 9677 | | | |
| HOBART 57 Crooked Billett Drive, Brighton TAS 7030 | phone fax | (03) 6262 8888 (03) 6262 8812 | | | (03) 6262 8888 (03) 6262 8812 |
| ADELAIDE 11 Stock Road, Cavan SA 5094 | phone fax | (08) 8262 4444 (08) 8262 6333 | | | (08) 8262 4444 (08) 8262 6333 |
| BRISBANE 57-71 Platinum Street, Crestmead QLD 4132 | phone fax | (07) 3803 9999 (07) 3803 1499 | | | |
| TOWNSVILLE 402-408 Bayswater Road, Garbutt QLD 4814 | phone fax | (07) 4412 3900 (07) 4412 3909 | | | |
| CAIRNS Vickers Street, Edmonton QLD 4869 | phone fax | (07) 4034 6555 (07) 4034 6511 | | | |
| MACKAY Brickworks Court, Glenella QLD 4740 | phone fax | (07) 4965 4000 (07) 4965 4012 | | | (07) 3803 9999 (07) 3803 1499 |
| MARYBOROUGH 10 Activity St, Maryborough QLD 4650 | phone fax | (07) 4123 9500 (07) 4123 9508 | | | |
| ROCKHAMPTON 41 Johnson St, Parkhurst QLD 4702 | phone fax | (07) 4921 5600 (07) 4921 5608 | | | |
| DARWIN 55 Albatross Street, Winnellie NT 0820 | phone fax | (08) 8930 6333 (08) 8930 6308 | | | |
| PERTH 605-615 Bickley Road, Maddington WA 6109 | phone fax | (08) 9493 8800 (08) 9493 8899 | | | |

TM and © Trademarks of Stramit Corporation Pty Limited. ABN 57 005 010 195 trading as Stramit Building Products

Part of Fletcher Building Group

© Stramit Corporation Pty Limited. August 2017.

COLORBOND® and ZINCALUME® are registered trademarks of BlueScope Steel Limited

This document replaces all previous issues. Please destroy, or clearly mark as superseded, all previous issues.