


ROOF SLOPE

Design Guide



ROOF SLOPE GUIDE

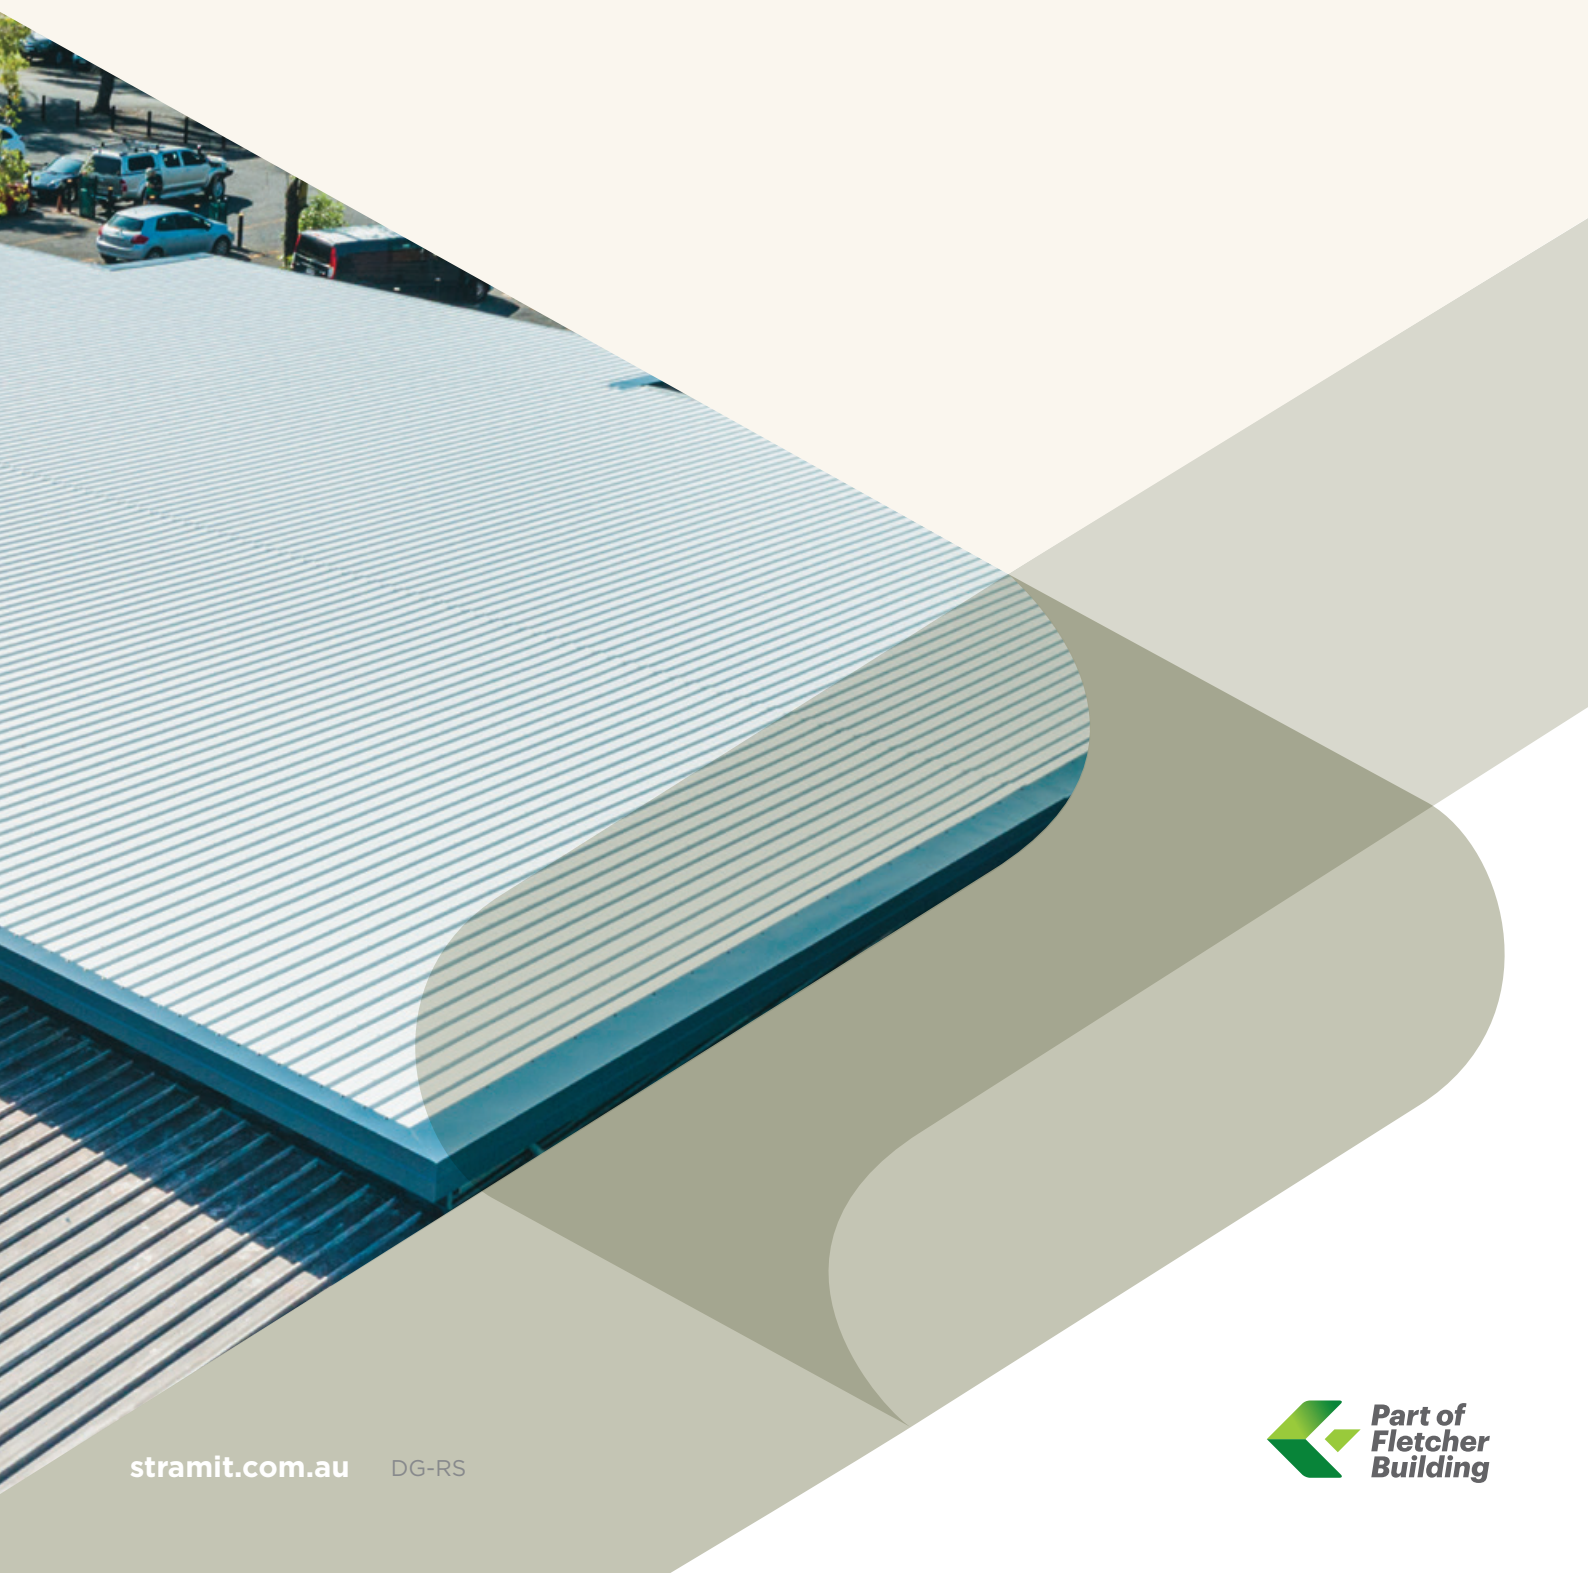

SELECTING THE OPTIMUM ROOFING PROFILE FOR APPLICATIONS WHERE ROOF SLOPE IS A KEY CONSIDERATION. INCORPORATES DETAILED REGIONAL RAINFALL INTENSITIES.



IMPORTANT NOTICE AND DISCLAIMER

The information contained within this brochure is for general use and information only. Before application in a particular situation, Stramit recommends that you obtain appropriate independent qualified expert advice confirming the suitability of product(s) and information in question for the application proposed. While Stramit accepts its legal obligations, be aware however that to the extent permitted by law, Stramit disclaims all liability (including liability for negligence) for all loss and damage resulting from the use of the information provided in this brochure.

ROOF SLOPE FACTORS

The major factors when considering roof slopes are

- Economy
- Drainage
- Durability
- Wind resistance
- Safety
- Services
- Aesthetics

This guide focuses particular attention on drainage and gives comprehensive information on the drainage characteristics of Stramit's range of roofing profiles. This, along with rainfall data for major locations, will enable easy selection of the best product for each application.

ECONOMY

Roof slope can have a significant effect on the cost of a building. The extent of this effect is dependent on building size and proportions. Generally the longer the roof slope and the lower the building height the greater the cost reduction from minimising roof slope. These savings are in the wall structure and wall cladding. It should be realised however that increasing the roof slope sufficiently could reduce wind pressures and lower the roof structure cost.

DRAINAGE

DESIGN BASIS


All roof slope/drainage capacities in this publication are based on rainfall intensity of a 100 year ARI (Average Recurrence Interval) of 5 minutes duration and AS1562.1. The effective flow areas of roofing profiles are conservative. They are based on water being limited to the depth fully below each profile anti-capillary feature, and further reduced by a freeboard allowance. Tests at University of Technology, Sydney on several Stramit profiles have confirmed the adequacy of the data.

ROOF RUN LENGTH

The roof run length is the combined length of roofing run contributing to water flow in any one sheeting pan (or trough) at the lowest edge. If roof penetrations or spreaders are present it is likely that the maximum roof run length will exceed the distance from the ridge to the eaves.

(Note - if practical place roof penetrations towards the top of a roof slope where water flow is less significant.)

Water flow is complex. However a simplified method of estimating water flow is generally satisfactory. The illustration shows a typical roof arrangement where two penetrations influence the roof run length in various sheeting pans. Although the nominal roof length is 30m, the Maximum Roof Run Length is 44m in this case. This increase will be lower if water is re-directed back into the original pans below the penetrations.

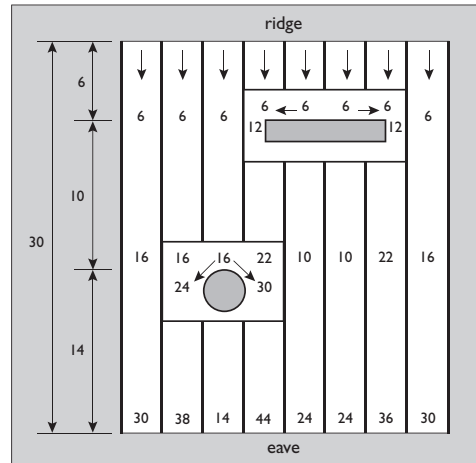


CURVED ROOFS

Spring-curved convex roofs can provide an excellent solution to roof drainage, particularly on large roofs. A convex curve approximates the increasing volume of water along the roof run and therefore can lead to efficient structures. Information on spring-curving of Stramit profiles can be found in the publication Spring Curving Guide.

VARIABLE PITCH ROOFS

On very large roofs drainage can lead to increases in roof slope and consequent increases in structure cost. A practical method to reduce the structure in these cases is to vary the pitch down the roof. Taking advantage of occasional expansion joints, each segment of roof sheeting can be at the optimised slope. For each roof segment the maximum roof run length is only considered from the lowest point of that segment to the ridge. The effects of any roof penetrations must be accounted for.

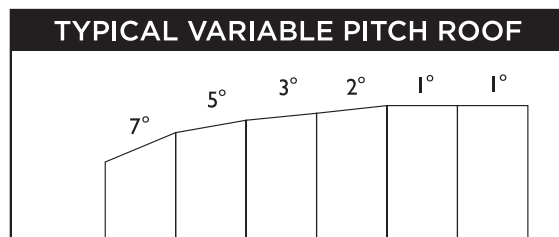

DURABILITY

Durability is considered from the perspective of minimum fall and the benefit of additional fall.

MINIMUM SLOPE

It is essential that the minimum fall of roof is maintained to ensure that water drains away. This minimum must be maintained over the entire roof, and throughout the life of the building. Water ponding on the roof will gather dirt and airborne particles. This compounds the problem by retaining moisture after most water has dried, and also soaking up condensation and dew. The ensuing prolonged exposure of a section of the roof to a damp 'chemical soup' will reduce life expectancy.

The minimum slopes set by Stramit for its profiles are based on two factors. These are sheeting stiffness (which resists permanent deflection) and the ability of a profile to be turned up or down at the sheet ends to prevent incursion of wind blown rain.

THE BENEFIT OF ADDITIONAL SLOPE

Further durability benefits can be gained from increasing slope. The major benefit comes from increased cleanliness. Increasing slope increases water velocity and assists gravity and wind in removing debris. A minimum slope of around 5° is considered necessary to achieve these benefits.

WIND RESISTANCE

Many factors influence wind pressure on a building, and on the roof in particular. These include site factors such as location, topography and exposure, as well as building geometry factors such as height, plan ratio and permeability. The slope of the roof is another factor. The influence of slope on wind pressures is inter-dependent on the building geometry factors. There is however a trend worth considering in building design.

As wind uplift pressure is often the limiting criterion in roof sheet sizing and spacing, it can be worth minimising. This can only be achieved by increasing the slope to 10° or more. At 20° the pressure can actually halve. Further increases to 45° have little effect, and beyond this pressures generally increase. Use AS/NZS1170.2 when considering changes to roof slope to reduce wind pressure.

SAFETY


Metal roof sheeting has a relatively smooth surface and, particularly in combination with oil from manufacture or surface water, can be slippery. Increasing the slope increases this risk. It is difficult to define a safe slope; however, roofs with a slope of more than around 25° require the use of ladders or walkways.

SERVICES

Where services are to be installed on the roof it is generally more convenient to minimise the roof slope. This will make installation and maintenance easier, improve safety and may reduce the visual impact.

AESTHETICS

For many buildings the roof forms a major visual component. Whether it be minimising slope to hide necessary rooftop services, or increasing the slope for overall visual balance, this guide will assist in selecting the correct product for the desired slope.

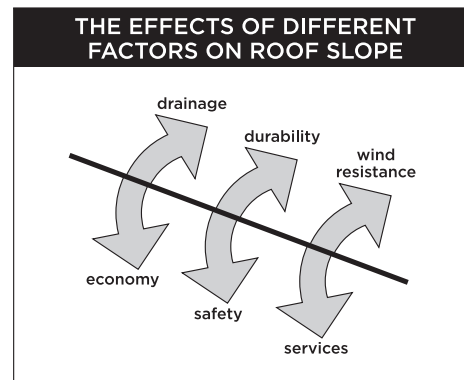

HOW TO USE

1. Calculate the maximum roof run length.
2. Establish the rainfall intensity for the location of the building. These can be read from the table for many Australian locations, or find the rainfall intensity from the Bureau of Meteorology web site using Latitude and Longitude.
3. Using the Roof Slope table for the next highest rainfall intensity, select a roofing profile and slope to match the maximum roof run length.
4. Check that the selected product is available for the building location using the Regional Product Availability chart.

REGIONAL RAINFALL INTENSITY

Values of rainfall intensity in the table have been derived from the National Construction Code Volume Two and the Bureau of Meteorology website. Specific data for any location can be obtained from the Bureau of Meteorology website based on the Latitude and Longitude. It should however be emphasised that the extent and longevity of records in Australia are limited and any such data therefore carries with it a degree of uncertainty.

100 YEAR RAINFALL INTENSITIES (mm/hr)			
Australian Capital Territory		Queensland	
Canberra	193	Brisbane	305
New South Wales		Bundaberg	340
Albury	180	Cairns	278
Armidale	238	Charleville	238
Batemans Bay	268	Charters Towers	250
Bathurst	164	Cloncurry	278
Bowral	220	Goondiwindi	258
Broken Hill	219	Gympie	278
Coffs Harbour	382	Innisfail	301
Cowra	190	Longreach	251
Dubbo	222	Mackay	316
Forbes	205	Mt.Isa	260
Gosford	313	Noosa Heads	331
Goulburn	156	Proserpine	293
Kempsey	287	Rockhampton	300
Lismore	270	Southport	335
Lithgow	196	Toowoomba	268
Maitland	266	Townsville	300
Mittagong	222	Warwick	252
Moss Vale	217	Tasmania	
Newcastle	316	Burnie	180
Nowra	247	Hobart	116
Orange	186	Launceston	121
Parramatta	209	Victoria	
Penrith	244	Ballarat	188
Port Macquarie	313	Geelong	144
Riverstone	234	Lakes Entrance	198
Robertson	248	Melbourne	187
Sydney	262	Mildura	218
Ulladulla	306	Stawell	186
Wagga Wagga	208	Western Australia	
Wollongong	308	Albany	178
Wyong	320	Broome	287
Northern Territory		Bunbury	199
Alice Springs	239	Derby	256
Darwin	274	Geraldton	193
Katherine	250	Perth	172
South Australia		Port Hedland	230
Adelaide	184		
Mt.Gambier	144		
Port Augusta	199		

PRODUCT AVAILABILITY

Not all profiles listed in this guide are available in all locations. The table below gives an indication of availability by region.

REGIONAL PRODUCT AVAILABILITY									
Sheeting/Decking	N.TER	N.QLD	S.QLD	NSW	ACT	VIC	TAS	S.AUS	W.AUS
Stramit® Corrugated	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit Longspan®	✓	✓	✓	✓	✓	✓	✓	✓	✓
Sharpline®	✗	✗	✓	✓	✓	✓	✓	✓	✓
Monoclad®	✓	✓	✓	✓	✓	✓	✓	✓	✓
Stramit Speed Deck® 500	✗	✗	✗	✗	✗	✗	✓	✗	✗
Speed Deck Ultra®	✓	✓	✓	✓	✓	✓	✓	✓	✓
Capacity Plus™ 660	✓	✓	✓	✓	✓	✗	✗	✗	✗

✓ readily available

✗ not normally available

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 160mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150		
Stramit® Corrugated		5.0	7.5	16	exceeds the scope of this guide											5.0	26
Stramit Longspan®				3.0	6.0	9.5	14.0	exceeds the scope of this guide								3.0	40
Sharpline®								3.0	3.5	4.5	5.5	6.5	7.5	8.5		3.0	97
Monoclad®												2.0	2.5	3.0		2.0	137
Stramit Speed Deck® 500															1.0	1.0	153
Speed Deck Ultra®															1.0	1.0	183
Capacity Plus™ 660															1.0	1.0	286

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 190mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150		
Stramit® Corrugated		5.0	12.0	exceeds the scope of this guide											5.0	22	
Stramit Longspan®			3.0	5.0	9.5	15.0	exceeds the scope of this guide								3.0	33	
Sharpline®							3.0	4.0	5.0	6.5	7.5	9.0	11.0	12.5		3.0	82
Monoclad®										2.0	2.5	3.0	3.5	4.0		2.0	116
Stramit Speed Deck® 500												1.0	1.5	1.5	2.0	1.0	128
Speed Deck Ultra®															1.0	1.0	154
Capacity Plus™ 660															1.0	1.0	241

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 220mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150		
Stramit® Corrugated	5.0	6.0	17.0	exceeds the scope of this guide											5.0	19	
Stramit Longspan®		3.0	3.5	7.5	13.5	exceeds the scope of this guide								3.0	29		
Sharpline®							3.0	4.5	5.5	7.0	9.0	10.5	12.5	14.5	17.0	3.0	71
Monoclad®										2.0	3.0	3.5	4.0	5.0	6.0	2.0	100
Stramit Speed Deck® 500											1.0	1.5	2.0	2.0	2.5	1.0	111
Speed Deck Ultra®													1.0	1.5	1.5	1.0	133
Capacity Plus™ 660															1.0	1.0	208

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 250mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150		
Stramit® Corrugated	5.0	8.5	exceeds the scope of this guide											5.0	16		
Stramit Longspan®		3.0	5.0	10.5	18.5	exceeds the scope of this guide								3.0	25		
Sharpline®						3.0	4.0	6.0	7.5	9.5	11.5	14.0	16.5	19.0		3.0	62
Monoclad®							2.0	2.5	3.0	4.0	4.5	5.5	6.5	8.0		2.0	88
Stramit Speed Deck® 500									1.0	1.5	1.5	2.0	2.5	3.0	3.5	1.0	97
Speed Deck Ultra®										1.0	1.5	1.5	2.0	2.5		1.0	117
Capacity Plus™ 660															1.0	1.0	183

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 280mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope		
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150				
Stramit* Corrugated	5.0	11.5	exceeds the scope of this guide													5.0	14		
Stramit Longspan*		3.0	7.0	14.0	exceeds the scope of this guide													3.0	23
Sharpline*					3.0	4.0	5.5	7.5	9.5	12.0	14.5	17.5	exceeds the scope of this guide				3.0	55	
Monoclad*							2.0	2.5	3.0	4.0	5.0	6.0	7.5	8.5	10.0	2.0		78	
Stramit Speed Deck* 500								1.0	1.5	2.0	2.0	3.0	3.5	4.0	4.5	1.0		87	
Speed Deck Ultra*										1.0	1.5	2.0	2.0	2.5	3.0	1.0		104	
Capacity Plus™ 660																1.0	1.0	163	

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 310mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope		
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150				
Stramit* Corrugated	5.0	14.5	exceeds the scope of this guide													5.0	13		
Stramit Longspan*		3.0	9.0	18.0	exceeds the scope of this guide													3.0	20
Sharpline*					3.0	5.0	7.0	9.5	12.0	15.0	18.0	exceeds the scope of this guide				3.0	50		
Monoclad*							2.0	3.0	4.0	5.0	6.5	7.5	9.0	10.5	12.5	2.0		71	
Stramit Speed Deck* 500								1.0	1.5	2.0	2.5	3.0	3.5	4.5	5.0	6.0	1.0		79
Speed Deck Ultra*										1.0	1.5	2.0	2.5	3.0	3.5	4.0	1.0		94
Capacity Plus™ 660																1.0	1.5	148	

MINIMUM ROOF SLOPES (degrees) FOR A RAINFALL INTENSITY OF 380mm/hr

sheeting/decking	total roof run length (m)															minimum roof slope (degrees) for sheeting / decking	maximum roof run length (m) at minimum slope					
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150							
Stramit* Corrugated	5.0	exceeds the scope of this guide														5.0	11					
Stramit Longspan*	3.0	5.0	15.0	exceeds the scope of this guide													3.0	16				
Sharpline*				3.0	5.0	7.5	11.0	14.5	18.0	exceeds the scope of this guide						3.0	41					
Monoclad*					2.0	2.5	3.5	5.0	6.5	8.0	10.0	12.0	14.0	16.5	19.0	2.0		58				
Stramit Speed Deck* 500								1.0	1.5	2.0	3.0	4.0	4.5	5.5	7.0	8.0	9.5	1.0		64		
Speed Deck Ultra*										1.0	1.5	2.0	2.5	3.0	4.0	4.5	5.5	6.5	1.0		77	
Capacity Plus™ 660																1.0	1.5	2.0	2.0	1.0		120

Note: Computations based on AS1562.1.

CONTACT US

Visit stramit.com.au or contact us using the details below.

REGION	LOCATION	CONTACT DETAILS	TECHNICAL ENQUIRIES
NSW & ACT	SYDNEY 33-83 Quarry Rd, Erskine Park NSW 2759	Ph 02 9834 0909 Fax 02 9834 0988	Ph 02 9834 0964
	CANBERRA 4 Bass St, Queanbeyan NSW 2620	Ph 02 6298 2500 Fax 02 6298 2533	
	COFFS HARBOUR 6 Mansbridge Dr, Coffs Harbour NSW 2450	Ph 02 6656 3800 Fax 02 6656 3808	
	NEWCASTLE 17 Nelson Rd, Cardiff NSW 2285	Ph 02 4041 3400 Fax 02 4041 3423	
	ORANGE 51 Leewood Dr, Orange NSW 2800	Ph 02 6360 9200 Fax 02 6360 9211	
VIC	MELBOURNE 3/1464 Ferntree Gully Rd, Knoxfield VIC 3180	Ph 03 9237 6300 Fax 03 9237 6399	Ph 03 9237 6353
	ALBURY 18 Ariel Dr, Albury NSW 2640	Ph 02 6092 3700 Fax 02 6092 3766	
	BENDIGO Lot 7-9 Ramsay Court, Kangaroo Flat VIC 3555	Ph 03 5448 6400 Fax 03 5447 9677	
TAS	HOBART 57 Crooked Billett Dr, Brighton TAS 7030	Ph 03 6262 8788 Fax 03 6262 8712	Ph 03 9237 6353
SA	ADELAIDE 11 Stock Rd, Cavan SA 5094	Ph 08 8219 2000 Fax 08 8219 2021	Ph 03 9237 6353
SOUTH QLD	BRISBANE 57-71 Platinum St, Crestmead QLD 4132	Ph 07 3803 9999 Fax 07 3803 1499	Ph 07 3803 9869
	MARYBOROUGH 10 Activity St, Maryborough QLD 4650	Ph 07 4123 9500 Fax 07 4123 9508	
	ROCKHAMPTON 41 Johnson St, Parkhurst QLD 4702	Ph 07 4921 5600 Fax 07 4921 5608	
NORTH QLD	CAIRNS 53 Vickers St, Edmonton QLD 4869	Ph 07 4034 6555 Fax 07 4034 6511	Ph 07 3803 9869
	TOWNSVILLE 402-408 Bayswater Rd, Garbutt QLD 4814	Ph 07 4412 3900 Fax 07 4412 3909	
	MACKAY 6 Brickworks Court, Glenella QLD 4740	Ph 07 4965 4000 Fax 07 4965 4012	
NT	DARWIN 55 Albatross St, Winnellie NT 0820	Ph 08 7922 4600 Fax 08 7922 4608	Ph 07 3803 9869
WA	PERTH 605-615 Bickley Rd, Maddington WA 6109	Ph 08 9493 8800 Fax 08 9493 8899	Ph 07 3803 9869

© 2020 Stramit Corporation Pty Limited ABN 57 005 010 195. A member of the Fletcher Building Group. Use of ™ and ® indicates trade marks of Stramit Corporation Pty Limited. This document replaces all previous issues. Please destroy, or clearly mark as superseded, all previous issues. STR041_JUN20.