






# LYSAGHT® COMMERCIAL HALF ROUND GUTTER

## SOUTH AUSTRALIA

The LYSAGHT® Commercial Half Round gutter provides greater water carrying capacity and the additional strength required for commercial applications. The LYSAGHT® Commercial Half Round gutter is available in a range of standard sizes; 200mm, 250mm, 300mm and 350mm in both slotted or unslotted profiles. Available in a wide range of COLORBOND® steel colours, ZINCALUME® steel and Heritage Galvanised, it can be cut to size in lengths up to 8m if required.

### STANDARD SIZES

Gutter Diameter	Cross Sectional Area (mm <sup>2</sup> )	Load per Meter	
		kgf/m	kN
200mm	12,812	15.7 kgf/m	0.15 kN
250mm	22,171	24.6 kgf/m	0.24 kN
300mm	32,492	35.4 kgf/m	0.35 kN
350mm	44,778	48.1 kgf/m	0.47 kN




### ACCESSORIES


A4 brackets - An innovation in commercial brackets

LYSAGHT® Commercial Half Round gutter is supported by our innovative and durable A4 external bracket. The LYSAGHT® A4 external bracket is manufactured from 3mm marine grade 5052 aluminium and engineer tested.

The bracket is easy to install and provides the strength required to handle a larger water carrying capacity. It won't buckle or fracture when filled in the event of a blocked downpipe.



A4 External Bracket

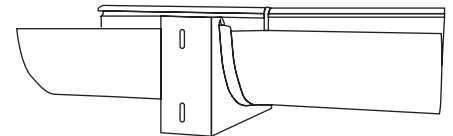

LYSAGHT® Commercial Half Round gutter with A4 External Bracket

### OTHER ACCESSORIES

Lysaght offer other accessories which complement the LYSAGHT® Commercial Half Round gutter to ensure you receive the correct fit, seal and longevity for your project every time.

All the Lysaght accessories are available in a range of colours to complete your project using the LYSAGHT® Commercial Half Round gutter.

- Stop ends: available for all widths
- Internal/external corners: available for all widths
- Sculpted nozzles: 90, 10 and 150mm available
- Round tapered downpipes: 100, 150, 200 and 225mm available